

FORM PTO-13
(REV 11-98)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

WDUMR-001US

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371

U.S. APPLICATION NO. (If known, see 37 CFR 1.5)

09/508353

INTERNATIONAL APPLICATION NO.

PCT/AU98/00738

INTERNATIONAL FILING DATE

09 September 1998

PRIORITY DATE CLAIMED

09 September 1997

TITLE OF INVENTION

CONTAINER WITH INTEGRAL HANDLE, PREFORM AND METHOD OF MANUFACTURE

APPLICANT(S) FOR DO/EO/US

BEALE, Glenn Robert

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☒ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☒ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11. to 16. below concern document(s) or information included:

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A **FIRST** preliminary amendment.
☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☐ Other items or information:

| 1. <i>Background information</i> 2. <i>Demographic information</i> 3. <i>Personal information</i> 4. <i>Current living situation</i> 5. <i>Current employment</i> 6. <i>Current income</i> 7. <i>Current expenses</i> 8. <i>Current assets</i> 9. <i>Current liabilities</i> 10. <i>Current net worth</i> 11. <i>Current credit rating</i> 12. <i>Current insurance coverage</i> 13. <i>Current tax status</i> 14. <i>Current legal status</i> 15. <i>Current health status</i> 16. <i>Current mental health status</i> 17. <i>Current physical health status</i> 18. <i>Current social health status</i> 19. <i>Current emotional health status</i> 20. <i>Current spiritual health status</i> 21. <i>Current intellectual health status</i> 22. <i>Current moral health status</i> 23. <i>Current ethical health status</i> 24. <i>Current environmental health status</i> 25. <i>Current technological health status</i> 26. <i>Current scientific health status</i> 27. <i>Current artistic health status</i> 28. <i>Current athletic health status</i> 29. <i>Current musical health status</i> 30. <i>Current literary health status</i> 31. <i>Current historical health status</i> 32. <i>Current geographical health status</i> 33. <i>Current political health status</i> 34. <i>Current economic health status</i> 35. <i>Current social health status</i> 36. <i>Current cultural health status</i> 37. <i>Current religious health status</i> 38. <i>Current philosophical health status</i> 39. <i>Current psychological health status</i> 40. <i>Current physiological health status</i> 41. <i>Current anatomical health status</i> 42. <i>Current biological health status</i> 43. <i>Current chemical health status</i> 44. <i>Current physical health status</i> 45. <i>Current mental health status</i> 46. <i>Current emotional health status</i> 47. <i>Current spiritual health status</i> 48. <i>Current intellectual health status</i> 49. <i>Current moral health status</i> 50. <i>Current ethical health status</i> 51. <i>Current environmental health status</i> 52. <i>Current technological health status</i> 53. <i>Current scientific health status</i> 54. <i>Current artistic health status</i> 55. <i>Current athletic health status</i> 56. <i>Current musical health status</i> 57. <i>Current literary health status</i> 58. <i>Current historical health status</i> 59. <i>Current geographical health status</i> 60. <i>Current political health status</i> 61. <i>Current economic health status</i> 62. <i>Current social health status</i> 63. <i>Current cultural health status</i> 64. <i>Current religious health status</i> 65. <i>Current philosophical health status</i> 66. <i>Current psychological health status</i> 67. <i>Current physiological health status</i> 68. <i>Current anatomical health status</i> 69. <i>Current biological health status</i> 70. <i>Current chemical health status</i> 71. <i>Current physical health status</i> 72. <i>Current mental health status</i> 73. <i>Current emotional health status</i> 74. <i>Current spiritual health status</i> 75. <i>Current intellectual health status</i> 76. <i>Current moral health status</i> 77. <i>Current ethical health status</i> 78. <i>Current environmental health status</i> 79. <i>Current technological health status</i> 80. <i>Current scientific health status</i> 81. <i>Current artistic health status</i> 82. <i>Current athletic health status</i> 83. <i>Current musical health status</i> 84. <i>Current literary health status</i> 85. <i>Current historical health status</i> 86. <i>Current geographical health status</i> 87. <i>Current political health status</i> 88. <i>Current economic health status</i> 89. <i>Current social health status</i> 90. <i>Current cultural health status</i> 91. <i>Current religious health status</i> 92. <i>Current philosophical health status</i> 93. <i>Current psychological health status</i> 94. <i>Current physiological health status</i> 95. <i>Current anatomical health status</i> 96. <i>Current biological health status</i> 97. <i>Current chemical health status</i> 98. <i>Current physical health status</i> 99. <i>Current mental health status</i> 100. <i>Current emotional health status</i> 101. <i>Current spiritual health status</i> 102. <i>Current intellectual health status</i> 103. <i>Current moral health status</i> 104. <i>Current ethical health status</i> 105. <i>Current environmental health status</i> 106. <i>Current technological health status</i> 107. <i>Current scientific health status</i> 108. <i>Current artistic health status</i> 109. <i>Current athletic health status</i> 110. <i>Current musical health status</i> 111. <i>Current literary health status</i> 112. <i>Current historical health status</i> 113. <i>Current geographical health status</i> 114. <i>Current political health status</i> 115. <i>Current economic health status</i> 116. <i>Current social health status</i> 117. <i>Current cultural health status</i> 118. <i>Current religious health status</i> 119. <i>Current philosophical health status</i> 120. <i>Current psychological health status</i> 121. <i>Current physiological health status</i> 122. <i>Current anatomical health status</i> 123. <i>Current biological health status</i> 124. <i>Current chemical health status</i> 125. <i>Current physical health status</i> 126. <i>Current mental health status</i> 127. <i>Current emotional health status</i> 128. <i>Current spiritual health status</i> 129. <i>Current intellectual health status</i> 130. <i>Current moral health status</i> 131. <i>Current ethical health status</i> 132. <i>Current environmental health status</i> 133. <i>Current technological health status</i> 134. <i>Current scientific health status</i> 135. <i>Current artistic health status</i> 136. <i>Current athletic health status</i> 137. <i>Current musical health status</i> 138. <i>Current literary health status</i> 139. <i>Current historical health status</i> 140. <i>Current geographical health status</i> 141. <i>Current political health status</i> 142. <i>Current economic health status</i> 143. <i>Current social health status</i> 144. <i>Current cultural health status</i> 145. <i>Current religious health status</i> 146. <i>Current philosophical health status</i> 147. <i>Current psychological health status</i> 148. <i>Current physiological health status</i> 149. <i>Current anatomical health status</i> 150. <i>Current biological health status</i> 151. <i>Current chemical health status</i> 152. <i>Current physical health status</i> 153. <i>Current mental health status</i> 154. <i>Current emotional health status</i> 155. <i>Current spiritual health status</i> 156. <i>Current intellectual health status</i> 157. <i>Current moral health status</i> 158. <i>Current ethical health status</i> 159. <i>Current environmental health status</i> 160. <i>Current technological health status</i> 161. <i>Current scientific health status</i> 162. <i>Current artistic health status</i> 163. <i>Current athletic health status</i> 164. <i>Current musical health status</i> 165. <i>Current literary health status</i> 166. <i>Current historical health status</i> 167. <i>Current geographical health status</i> 168. <i>Current political health status</i> 169. <i>Current economic health status</i> 170. <i>Current social health status</i> 171. <i>Current cultural health status</i> 172. <i>Current religious health status</i> 173. <i>Current philosophical health status</i> 174. <i>Current psychological health status</i> 175. <i>Current physiological health status</i> 176. <i>Current anatomical health status</i> 177. <i>Current biological health status</i> 178. <i>Current chemical health status</i> 179. <i>Current physical health status</i> 180. <i>Current mental health status</i> 181. <i>Current emotional health status</i> 182. <i>Current spiritual health status</i> 183. <i>Current intellectual health status</i> 184. <i>Current moral health status</i> 185. <i>Current ethical health status</i> 186. <i>Current environmental health status</i> 187. <i>Current technological health status</i> 188. <i>Current scientific health status</i> 189. <i>Current artistic health status</i> 190. <i>Current athletic health status</i> 191. <i>Current musical health status</i> 192. <i>Current literary health status</i> 193. <i>Current historical health status</i> 194. <i>Current geographical health status</i> 195. <i>Current political health status</i> 196. <i>Current economic health status</i> 197. <i>Current social health status</i> 198. <i>Current cultural health status</i> 199. <i>Current religious health status</i> 200. <i>Current philosophical health status</i> 201. <i>Current psychological health status</i> 202. <i>Current physiological health status</i> 203. <i>Current anatomical health status</i> 204. <i>Current biological health status</i> 205. <i>Current chemical health status</i> 206. <i>Current physical health status</i> 207. <i>Current mental health status</i> 208. <i>Current emotional health status</i> 209. <i>Current spiritual health status</i> 210. <i>Current intellectual health status</i> 211. <i>Current moral health status</i> 212. <i>Current ethical health status</i> 213. <i>Current environmental health status</i> 214. <i>Current technological health status</i> 215. <i>Current scientific health status</i> 216. <i>Current artistic health status</i> 217. <i>Current athletic health status</i> 218. <i>Current musical health status</i> 219. <i>Current literary health status</i> 220. <i>Current historical health status</i> 221. <i>Current geographical health status</i> | |
|--|--|
|--|--|

097508353

430 Rec'd PCT/PTO 09 MAR 2000

"Express Mail" mailing label number EL531408924USDate of Deposit March 9, 2000

Case No.: WDUMR-001US

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Commissioner of Patents and Trademarks, Washington, D.C. 20231

SHAUNA S. CLARK

(Typed or Printed name of person mailing paper or fee)



(Signature of person mailing paper or fee)

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: BEALE, Glenn Robert)

Group No.:

Serial No.: UNKNOWN)

Examiner:

Filed: HEREWITH)

For: CONTAINER WITH)

INTEGRAL HANDLE, PREFORM AND)

METHOD OF MANUFACTURE)

PRELIMINARY AMENDMENT

Hon. Commissioner of Patents
and Trademarks

Box New Application
Washington, D.C. 20231

Dear Sir:

Please delete Claims 1-79 and add the following new claims:

80. A preform for a container comprised of orientable thermoplastic material and arranged so that the resultant blown container will include a handle or like support structure; said preform comprising a molded structure having a neck portion and an expandable portion below the neck, said neck including a locating ring above the expandable portion and a solid stem or orientable thermoplastics material projecting from the preform and molded integrally therewith which when the container is formed constitutes the handle.

81. The preform of Claim 80, wherein the preform is formed by an injection process including two separate, first and second, points of injection.

82. The preform of Claim 81, wherein the first point of injection injects non-recycled PET or like thermoplastics material to form a portion of the preform.

097508353-10600

91. The method of claim 90, wherein the neck portion and integral handle are subjected to a crystallization step.

92. The method of claim 90, wherein the blow molding operation includes supporting the stem whilst the preform is blown in a manner whereby at least a portion of the external side of the body of the container expands to encircle at least a lower portion of the stem so as to form an enclosed grip portion between the external side and the solid stem.

93. The method of claim 92, wherein the enclosed grip portion is sized to allow at least two fingers of an adult human hand to pass therethrough.

94. The method of claim 90, wherein the stem is formed so as to have an I-shaped cross-section at least throughout that portion of the stem where it projects from the external side of said preform.

95. A container formed by the method of Claim 90

96. A parison for an injection stretch blow moulding process, said parison formed by an injection process including two separate, first and second points of injection.

97. The parison of claim 96, wherein the first point of injection permits injection of non-recycled PET or like thermoplastics material to form a portion of the parison.

98. The parison of claim 96, wherein the second point of injection permits injection of PET or like thermoplastics material incorporating at least a portion of recycled material to form a portion of the parison.

99. The parison of claim 96, wherein said first point of injection is for the formation of that part of the parison which will be stretched during a stretch blow moulding operation on the parison.

100. The parison of Claim 96, further comprising a tag extending from a lower edge of a handle portion of said preform, the tag being integrally connected to the preform.

REMARKS

This preliminary Amendment is being filed to conform the claims to United States practices.

Respectfully submitted,

Dated: 3/9/00 By: Lowell Anderson

Lowell Anderson
Registration No. 30,990
STETINA BRUNDA GARRED & BRUCKER
24221 Calle de la Louisa, 4th Floor
Laguna Hills, California 92653
(949) 855-1246

LA/ssc
C:\FOREIGN\Wdumr\1usprelm.amd.wpd

0950033-14600
07907-00000000



STATEMENT CLAIMING SMALL ENTITY STATUS
(37 CFR 1.9(f) & 1.27(c))—SMALL BUSINESS CONCERN

Doclet Number (Optional)
WDUMR-001US

Applicant, Patentee, or Identifier: Glenn Robert BEALE
Application or Patent No.: 09/508,353
Filed or Issued: March 09 2000
Title: CONTAINER WITH INTEGRAL HANDLE, PREFORM AND METHOD OF MANUFACTURE

I hereby state that I am

- ☐ the owner of the small business concern identified below.
☒ an official of the small business concern empowered to act on behalf of the concern identified below.

NAME OF SMALL BUSINESS CONCERN: BEALETEC PTY LTD

ADDRESS OF SMALL BUSINESS CONCERN: 15-20 Barrack Street, Suite 801, Sydney
NSW 2000, AUSTRALIA

I hereby state that the above identified small business concern qualifies as a small business concern as defined in 37 CFR Part 1.21 for purposes of paying reduced fees to the United States Patent and Trademark Office. Questions related to size standards for a small business concern may be directed to: Small Business Administration, Size Standards Staff, 409 Third Street, SW, Washington, DC 20416.

I hereby state that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention described in:

- ☐ the specification filed herewith with title as listed above.
☒ the application identified above.
☐ the patent identified above.

If the rights held by the above identified small business concern are not exclusive, each individual, concern, or organization having rights in the invention must file separate statements as to their status as small entities, and no rights to the invention are held by any person, other than the inventor, who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person made the invention, or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d), or a nonprofit organization under 37 CFR 1.9(e).

- Each person, concern, or organization having any rights in the invention is listed below:
☐ no such person, concern, or organization exists.
☒ each such person, concern, or organization is listed below.

Separate statements are required from each named person, concern or organization having rights to the invention stating their status as small entities. (37 CFR 1.27)

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate (37 CFR 1.28(b)).

NAME OF PERSON SIGNING: GLENN. ROBERT BEALE
TITLE OF PERSON IF OTHER THAN OWNER: Director
ADDRESS OF PERSON SIGNING: 9 COMWELL PL KINGS LANGLEY
SIGNATURE: [Signature] DATE: 16/10/2000

CONTAINER WITH INTEGRAL HANDLE, PREFORM
AND METHOD OF MANUFACTURE

INTRODUCTION

5 This invention relates to a container with integral handle, preform from which the container is biaxially blown and a method of manufacture thereof.

BACKGROUND OF THE INVENTION

Attempts have been made to incorporate integral handles in PET and like injection blow moulded containers -
10 for example see US 4,629,598 to Thompson, assigned to Tri-Tech Systems International, Inc. The parison from which the handled bottles of US 4,629,598 are produced is illustrated in Fig. 1. To date, however, attempts to produce a practical, mass produced version of this
15 arrangement have been unsuccessful. Instead, the best that appears to have been done in commercial practice is an arrangement whereby the blown containers are arranged to accept a clip on or snap on handle in a separate production step after the container itself is formed. See for example
20 WO82/02371 and WO82/02370, both to Thompson.

Injection-stretch-blow moulding is a process in which the parison is stretched both axially and radially, resulting in biaxial orientation.

Biaxial orientation provides increased tensile
25 strength (top load), less permeation due to tighter alignment of the molecules, and improved drop impact, clarity, and lightweighting of the container.

Not all thermoplastics can be oriented. The major thermoplastics used are polyethylene terephthalate (PET),
30 polyacrylonitrile (PAN), polyvinyl chloride (PVC), and polypropylene (PP). PET is by far the largest volume material, followed by PVC, PP, and PAN.

The amorphous materials, e.g., PET, with a wide range of thermoplasticity are easier to stretch-blow than the
35 partially crystalline types such as PP. Approximate melt

-2-

and stretch temperatures to yield maximum container properties are:

| | Material | Melt, Degrees C. | Stretch, Degrees C. |
|---|----------|------------------|---------------------|
| 5 | PET | 280 | 107 |
| | PVC | 180 | 120 |
| | PAN | 210 | 120 |
| | PP | 240 | 160 |

There are basically two types of processes for stretch-blow moulding: 1) single-stage in which preforms are made and bottles blown on the same machine, and 2) two-stage in which preforms are made on one machine and blown later on another machine.

Single-stage equipment is capable of processing PVC, PET, and PP. Once the parison is formed (either extruded or injection moulded), it passes through conditioning stations which bring it to the proper orientation temperature. The single-stage system allows the process to proceed from raw material to finished product in one machine, but since tooling cannot be easily changed, the process is best suited for dedicated applications and low volumes.

Oriented PVC containers most commonly are made on single-stage, extrusion-type machines. The parison is extruded on either single- or double-head units. Temperature conditioning, stretching, and thread forming are done in a variety of ways depending on the design of the machine. Many of the processes presently in use are proprietary.

Many oriented PET containers are produced on single-stage machines. Preforms are first injection moulded, then transferred to a temperature conditioning station, then to the blow moulding operation where the preforms are stretch-blown into bottles, and finally to an eject station.

With the two-stage process, processing parameters for both preform manufacturing and bottle blowing can be optimized. A processor does not have to make compromises

-3-

for preform design and weight, production rates, and bottle quality as he does on single-stage equipment. He can either make or buy preforms. And if he chooses to make them, he can do so in one or more locations suitable to his market. Both high-output machines and low output machines are available. Two stage extrusion-type machines generally are used to make oriented PP bottles. In a typical process, preforms are re-extruded, cooled, cut to length, reheated, stretched while the neck finish is being trimmed, and ejected. The two-stage process is the lowest-cost method to produce oriented PET containers. The two-stage process, which permits injection moulding of the preform and then shipping to blow moulding locations, has allowed companies to become preform producers and to sell to blow moulding producers. Thus companies that wish to enter the market with oriented PET containers can minimise their capital requirements. Two-stage stretch-blow moulding also is being used for production of oriented PVC containers. Preform design and its relationship to the final container remains the most critical factor. The proper stretch ratios in the axial and hoop directions must be met if the container is to properly package its intended product.

| Material | Stretch Ratios | Orientation Temp.Deg.F |
|----------|----------------|------------------------|
| PET | 16/1 | 195-240 |
| PVC | 7/1 | 210-240 |
| PAN | 9/1 | 220-260 |
| PP | 6/1 | 260-280 |

It is an object of the present invention to produce a practical, readily implementable injection, stretch blow moulded container made from an orientable thermoplastics material incorporating a handle which is formed during and as part of the said injection, stretch blow moulding operation.

SUMMARY OF THE INVENTION

According to one aspect of the invention, there is provided a preform for a container comprised of orientable

-4-

thermoplastic material and arranged so that the resultant blown container will include a handle or like support structure; said preform comprising a moulded structure having a neck portion and an expandable portion below the neck, said neck including a locating ring above the expandable portion and a solid stem of orientable thermoplastics material projecting from the preform and moulded integrally therewith which when the container is formed constitutes the handle.

Preferably said stem projects from said locating ring and from a temperature transition zone located immediately below said ring.

According to another aspect of the invention there is provided a method of forming a container having an integral handle; said method comprising:

(a) forming a preform having a neck portion and an expandable portion below the neck portion, said neck portion including a locating ring above the expandable portion and a solid stem of orientable thermoplastics material projecting from the preform and moulded integrally therewith, and

(b) performing a blow moulding operation on said preform to expand the expandable portion to form the body of the container.

Preferably said stem projects from said locating ring and from a temperature transition zone located immediately below said ring.

In a preferred form of the invention, the neck portion and integral handle are subjected to a crystallisation step.

Preferably, the blow moulding operation includes supporting the stem whilst the preform is blown in a manner whereby at least a portion of the external side of the tube expands to encircle at least a lower portion of the stem so as to form an enclosed grip portion between the external side and the solid stem.

-5-

It is preferred that the enclosed grip portion allows at least two fingers of the adult human hand to pass therethrough.

In a particularly preferred form of the invention the stem is formed so as to have an I-shaped cross-section at least throughout that portion of the stem where it projects from the external side of said tube. The handle may be curved to provide additional strength.

In a further broad form of the invention there is provided a parison for an injection stretch blow moulding process, said parison formed by an injection process including two separate points of injection.

Preferably a first point of injection permits injection of non-recycled PET or like thermoplastics material. Preferably a second point of injection permits injection of PET or like thermoplastics material incorporating at least a portion of recycled material.

Preferably said first point of injection is for the formation of that part of the parison which will be stretched during a stretch blow moulding operation on the parison. Preferably said second point of injection is for the formation of those parts of said parison which will remain unexpanded or substantially unexpanded in a stretch blow moulding operation on said parison.

In yet a further broad form of the invention there is provided a container manufactured from a two stage injection stretch blow moulding process, said container including a graspable handle affixed at at least a first point and a second point to said container so as to form an enclosed area between the handle and the bottle and through which the fingers of a human hand may be passed.

Preferably said first point of connection comprises an integral connection between the handle and the container and is formed in said first step of said two step operation.

Preferably said second point of connection is formed during said second step of said two step operation.

-6-

Preferably said handle at said second point of interconnection includes a bulbous portion adapted to be at least partially enfolded by a portion of said container as it is blown during said second step of said two step operation whereby a mechanically interlocked connection is formed at said second point of connection of said handle to said container.

In particular preferred forms said bulbous portion comprises one of an upwardly extending hook, a downwardly extending hook, a bulb or a combination of one or more thereof.

In a further broad form of the invention there is provided a method of production of an integral handle PET container including the step of shrouding a handle stem portion of a preform during preheating of said preform preparatory to a stretch blow moulding step.

Preferably the handle stem is fully supported in a mould cavity against movement during the stretch blow moulding operation.

In a further broad form of the invention there is provided a container comprised of biaxially orientable thermoplastic material manufactured from a two stage injection stretch blow moulding process; said two stage process comprising a first stage in which a preform is manufactured and a second stage in which said preform is reheated and biaxially stretched to form said container; said container including a graspable handle affixed at at least a first point of connection and a second point of connection to said container so as to form an enclosed area between said handle and said container and through which at least two fingers of a human hand can pass; and wherein said first point of connection comprises an integral connection between the handle and the container and is formed in said first stage of said two stage process.

-7-

BRIEF DESCRIPTION OF THE DRAWINGS

Embodiments of the present invention will now be described by way of example, with reference to the accompanying drawings, in which:

5 Fig. 1 is a side view of a prior art parison,
Fig. 2 is a side view of a parison incorporating features according to embodiments of the present invention,
Fig. 3 is a partial side elevational view of a blow moulded PET container formed from a preform according to one
10 embodiment of the invention;
Fig. 4 illustrates the steps of formation of a parison according to another embodiment of the invention.
Fig. 5A is a side view of a preform according to a further embodiment of the invention;
15 Fig. 5B is a side view of a container formed from the preform of Fig. 5A.
Fig. 6 is a side view of a die in open position for manufacture of a preform;
Fig. 7 is the die of Fig. 6 in closed position;
20 Fig. 8 is a side view of the die of Figs. 6 and 7 showing the stem of the preform located therein,
Fig. 9 is a top view of a two stage injection, blow mould machine adapted to receive preforms and biaxially orient them into blown containers according to an embodiment of
25 the invention,
Fig. 10 is a side section view of a lifting, lowering and rotating mechanism for handle covers for use with the machine of Fig. 9,
Fig. 11 is an alternative side section view of the
30 mechanism of Fig. 10,
Fig. 12 is a side section, close up view of the machine of Fig. 9 showing a preform with handle cover lowered over the handle portion thereof,
Fig. 13A,B illustrates first and second side section views
35 of a preform adapted for loading into the machine of Fig. 9,
Fig. 14 is a perspective view of the preform of Fig. 13,

-8-

Fig. 15 is a perspective view of a container blown from the preform of Fig. 14 on the machine of Fig. 9,

Fig. 16 is a plan view of a half mould adapted for blowing preforms on the machine of Fig. 9,

5 Fig. 17 is a top view of the mould of Fig. 16 with a preform inserted therein ready for blowing on the machine of Fig. 9,

Fig. 18 is a bottom view of Fig. 17 with both half moulds in opposed relationship,

10 Fig. 19 is a further bottom view of Fig. 17 showing the preform in the position of Fig. 17,

Fig. 20 is a section view through the half mould of Fig. 16,

Fig. 21 is a section view through the mould of Fig. 16,

15 Fig. 22 is a side view of the container of Fig. 15 blown in the mould of Fig. 19 from a preform as illustrated in Fig. 13 and 14,

Fig. 23 is a detail, side section view of the neck and top handle portion of the container of Fig. 22,

20 Fig. 24 is a side view of a preform incorporating an enlarged first non-expanding region according to a further embodiment of the invention,

Fig. 25 is an alternative side view of the preform of Fig. 24,

25 Fig. 26 is a side view of a container blown from the preform of Fig. 24 on the machine of Fig. 9,

Fig. 27 is a perspective view of the preform of Fig. 24,

Fig. 28 is a perspective view of the container of Fig. 26,

30 Fig. 29 is a side view of yet a further alternative embodiment of a preform incorporating a lengthened or enlarged first non-expanding zone and adapted for blowing on the machine of Fig. 9,

Fig. 30 is a side view of a container blown from the preform of Fig. 29 on the machine of Fig. 9,

35 Fig. 31 is a plan view of a half mould for blowing the preform of Fig. 24,

-9-

Fig. 32 is a plan view of the half mould of Fig. 31 with the preform of Fig. 24 inserted therein ready for blowing on the machine of Fig. 9,
Fig. 33 is a side section view of a container blown in the mould of Fig. 32 and
Fig. 34 is a detail side section view of the neck and top handle portion of the container of Fig. 33.
Fig. 35 is a first perspective view of a container according to a further embodiment of the invention particularly adapted to resist high internal pressures,
Fig. 36 is a second perspective view of the container of Fig. 35,
Fig. 37 is a first side view of the container of Fig. 35,
Fig. 38 is a second side view of the container of Fig. 35,
Fig. 39 is a plan view of the container of Fig. 35,
Fig. 40 is a side view of a preform from which the container of Fig. 35 can be blown,
Fig. 41 is a perspective view of the preform of Fig. 40,
Fig. 42 is a perspective view of a container with strap connected handle according to a further embodiment of the invention, and
Fig. 43 is a side view of a preform from which the container of Fig. 42 can be blown.

DETAILED DESCRIPTION OF THE DRAWINGS

A container 10 according to an embodiment of the invention is shown in Fig. 3. It includes a neck 11 and an expanded portion 12.

The neck 11 has a threaded portion 13 and a locating ring 14. Moulded integrally with the ring 14 is a stem 15 having a first portion 15a extending outwardly from the ring 14 and a second portion 15b so inclined to the first portion 15a that it is nearly parallel to a vertical axis of the container 10. In this instance, the first portion 15a subtends an angle of slightly more than 45° to the wall 20 and the second portion subtends an angle of about 20° to the wall 20.

-10-

The particular shape of the stem 15 is selected so that when formed as a handle it may be grasped by fingers of the human hand.

5 The stem 15 terminates in a stem end 16 which faces generally downwardly in the general direction of closed end of the container 10.

10 In this instance, the stem 15 is of I-shaped cross-section to combat unwanted effects arising at or near junction 17 of stem 15 with the ring 14 following a blowing operation on the preform 10.

These unwanted effects particularly include stress effects and air inclusions resulting from non-uniform cooling through preform volumes of differing cross-section.

15 In this embodiment of the invention, the preform is made from PET and is prepared utilizing a heated mould.

20 In order to produce the container 10, the parison or preform 26 (see Fig. 2) according to an embodiment of the invention can be placed in a blow moulding machine (not shown) and blow moulded according to bi-axial orientation blow moulding techniques with the neck 11 being held in a mould in such a way as not to expand. Initially, the expandable portion of the preform below the neck can be mechanically stretched downwardly to the bottom of the mould and then the bulk of the preform can be blown
25 outwardly by application of compressed air to the extent that a support portion 18 is formed around the stem end 16 such that an enclosed area 19 is formed between wall 20 of the container 10 and the stem 15 in the process of the formation by blow moulding of container 10.

30 In a particular preferred form of the invention, the enclosed area 19 is of sufficient cross-sectional area to allow at least two fingers of a human hand to be inserted therethrough and to grasp handle 15 so as to support the container 10.

35 The blow moulding operation is carried out in such a way so as to provide a bottle or container having optimum strength by achieving biaxial orientation of the molecules

-11-

of the preferred PET material as well as improved barrier properties to reduce oxidation.

In accordance with an embodiment of the invention, the neck 11 and handle 15 can be crystallised by over-heating those parts of the preform. The crystallisation of the handle increases its rigidity which assists orientation of the preform and permits the use of less material.

Crystallisation of the neck and handle can be carried out by running hot oil over the neck and handle, applying an open flame or by blowing hot air.

The location of the handle 15 on the ring 14 ensures that there is minimum interference to the blow moulding process applied to the remainder of the preform. Either a one stage or two stage process can be used.

Detailed Description of Further Embodiments

Fig. 1 illustrates the prior art preform or parison 21 of US 4,629,598. The concept of this prior art disclosure is to form a handle portion 23 from the locating ring of non-expandable portion 22 of the parison 21.

With reference to Fig. 2 and with reference to the detailed description of the preferred embodiment this arrangement of Fig. 1 is modified according to the present invention in a number of respects.

Insets 2A, 2B and 2C show bulbous portions 27 forming part of stem end 16 in the shape, respectively of a downwardly extending hook 24a, a bulb 24b and an upwardly extending hook 24c.

These portions have in common a shape which is adapted to engage mechanically with a blown portion of the container 10 which is adapted to envelop the bulbous portion 27.

The process by which the second stage blow of the expandable portion 12 of parison 26 is effected so as to envelope the bulbous portion 27 of stem end 16 is a stretch blow, biaxial orientation process.

-12-

With reference to Fig. 4 a particular method of manufacture of the parison 26 according to another embodiment of the invention is illustrated. It includes a two stage process for the formation of the parison by an injection moulding process. In Stage 1 a first injection mould inlet 28 permits entry of plastics material for the formation of the expanded portion 12 of the parison 26 (expanded in the blow moulding stage of container formation, with reference to Fig. 3).

In a second stage of the injection moulding process for the formation of parison 26 a second injection mould inlet 29 permits entry of plastics material for the formation of the non-expandable portion 25 of parison 26.

The two stage injection arrangement is such that different plastics materials may be injected through first injection mould inlet 28 and second injection mould inlet 29.

In a particular preferred form the plastics material injected in first injection mould inlet 28 is non-recycled or substantially non-recycled plastics material whilst the plastics material injected into second injection mould inlet 29 is recycled or at least partially recycled plastics material.

This arrangement permits controlled use of proportions of recycled and non-recycled plastics material in order to achieve optimum economics in the construction of parison 26.

In a modification of this arrangement the Stage 2 step can include the production of two walls in the non-expandable portion 25 comprising inner wall 51 and outer wall 52. Inner wall 51 is made from virgin or non-contaminated PET material and acts as an insulation barrier with respect to wall 52 which can be made from recycled material 52. This dual wall arrangement can be produced by use of a sliding core arrangement as a modification in the die arrangement and process described with reference to Figs. 6, 7 and 8 later in this specification.

-13-

Of course the Stage 1 and Stage 2 steps of Fig. 4 can be interchanged in order.

A parison and resulting container according to a further embodiment of the invention are illustrated in Figs. 5A and B respectively. Like parts are numbered as for previous embodiments.

In this embodiment the parison 21 includes a locating ring 14 immediately below which is a first non-expanding region 30 and a second non-expanding region 31. The first non-expanding region 30 may itself be formed so as to be slightly raised or otherwise differentiated from the expandable portion of parison 21. Second non-expanding region 31 may not be differentiated from the expandable portion of parison 21 but, in use, the blowing operation will be such as to ensure that the second non-expanding region 31 is not expanded in the blowing process.

In this case the stem 15 includes a first rib 32 integrally moulded with and extending from locating ring 14. The stem 15 also includes second rib 33 integrally moulded with and extending from second non-expanding region 31. Stem 15 further includes a rib connector 34 integrally moulded with and extending from first non-expanding region 30 and forming a continuous connection between first rib 32 and second rib 33 throughout the length of stem 15.

The parison 36 of Fig. 5A is then blown in the manner previously described to form the volume 35 of container 37 illustrated in Fig. 5B. The neck portion including stem 15, ring 14, first non-expanding region 30 and second non-expanding region 31 remain unexpanded whilst the expandable portion 36 of parison 36 is biaxially stretched to form the major volume 35 of container 37. The stem end 16 may include the bulbous portions according to the previously described embodiments for connection to container 37 or, either alternatively or in addition can include the application of an adhesive material whereby a chemical bond is formed between stem end 16 and the wall of container 37 by the use of a chemical intermediary.

-14-

In a modification of the embodiments of Fig. 5A and Fig. 5B first non-expanding region 30 and second non-expanding region 31 can form part of a single non-expanding region.

5 In yet a further modification second non-expanding region 31 can be located in the temperature transition zone of the container and wherein minor expansion during the blow moulding step may take place.

10 In yet a further modification both first non-expanding region 30 and second non-expanding region 31 may be located in the temperature transition zone immediately below the locating ring 14 and, again, minor expansion of these regions may take place during blowing.

15 With respect to the last two variations described advantage is taken of the observation that expansion at the temperature transition zone can be limited by appropriate mould design and process control whereby unwanted distortion effects caused by the rigid interconnection of this temperature transition zone 30, 31 via second rib 33 and rib connector 34 to ring 14 (or other non-expanding
20 portion of the neck 11) can be controlled.

In use preforms and containers blown therefrom can be manufactured as follows:

25 A preform is formed from orientable thermoplastics material, preferably PET or like material in an injection moulding process. Slidable dies are illustrated in Figs. 6, 7 and 8 and include a sliding core 40, sliding blocks 41, body 42, base 43, push block 44 and splits holder 45. Fig. 6 illustrates the die in open position, Fig. 7
30 illustrates the die in closed position and Fig. 8 illustrates a side view showing accommodation of the stem 14.

35 The completed preforms in a second and preferably separate step are subsequently passed to a stretch blow mould machine where the preforms are first reheated to the appropriate transition temperature (refer introduction). The non-expandable portion of the preform including

-15-

locating ring 14 and stem 15 are shielded substantially from the reheat process by appropriate guarding. In most instances there is likely to be a temperature transition zone in the region 30, 31 described with reference to Figs. 5A, 5B.

The reheated preform is then placed in a mould and biaxially stretched and the expandable portion blown to full size utilising processes known in the art. During this process the preform is supported at neck 14 and may also be supported at stem 15. Stem 15 does not take part in the blow process although its stem end 16 may be partially enveloped by an external wall of the blown container.

**DETAILED DESCRIPTION OF METHODS OF MANUFACTURE
INCORPORATING MODIFIED TWO STAGE STRETCH BLOW MOULDING
MACHINES**

Fig. 9 illustrates a modified two stage stretch blow mould machine 110 adapted to stretch blow mould (including biaxial orientation) of the preforms of previous embodiments and preforms of further embodiments to be described below with reference to later figures.

The machine 110 comprises a first carousel 111 adapted to receive integral handle preforms 112 from inclined chute 113 into apertures 114 spaced around the periphery thereof.

As first carousel 111 rotates it moves, via apertures 114 the preforms 112 from the chute 113 to a second carousel loading position where the preform 112 is transferred to a spindle 115 mounted near the periphery of second carousel 116.

A sector of approximately 270° of second carousel 116 is arranged as a preheating tunnel 117 where the preforms 112 are progressively heated by a heating bank mounted in opposed relationship to the path of travel of the preforms.

The suitably preheated preforms 112 are loaded consecutively into apertures 119 of a third carousel 120 which acts as a transfer mechanism to both suitably orient the preforms 112 about their longitudinal axis and present

-16-

them to a mould cavity 121 comprising first half mould 122 and second half mould 123.

It should be noted that during their time in the preheating tunnel 117 the preforms 112 are rotated about their longitudinal axis by spindles 115 and have a handle shroud 124 mounted over the preform stem which subsequently forms a handle for blown container 125. Details of the rotation of spindles 115 and the shrouding of the preform stem are discussed more fully with reference to Figs. 10, 11 and 12.

Mould cavities 121 are mounted on the periphery of a fourth carousel 126. During their travel through approximately a 270° sector the half moulds 122, 123 rotate to a closed position about their axis 127 and, whilst closed, the preform 112 enclosed therein is blown and biaxially stretched in known manner in order to produce an integral handle, blown container 125. This container 125 is ejected as illustrated when the half moulds open preparatory to receiving a fresh, preheated preform 112.

With reference to Fig. 10 further detail is shown of spindles 115 and handle shrouds 124 and their manner of operation upon and in relation to preforms 112 whilst passing through preheating tunnel 117 on second carousel 116.

The spindles 15 are rotated by band drive 128 so as to, in one embodiment, rotate the preforms 112 through approximately four full axial rotations during their passage through the preheating tunnel 117.

Whilst in the preheating tunnel 117 a handle shroud 124 is lowered over the free end 129 of handle stem 130 so as to fully shroud the handle stem 130 as best seen in greater detail in Fig. 12.

The shroud 124, in one preferred form, is cylindrical save for a fluted open mouth 131 best seen in Fig. 12. The fluted mouth 131 assists in ensuring maximal shrouding of handle stem 130 and also assists in guiding the shroud 124 onto the free end 129 of stem 130.

-17-

Lifting and lowering of the shroud 124 is effected through a shroud support stem 132 which is suspended from a cam follower 133 adapted to travel on cam 134.

The stems 132 are themselves rotated by band drive 135 so as to follow the rotation of spindles 115. As best seen in end view of Fig. 11 the shroud support stem 132 is offset from the cam follower stem 136 by virtue of being mounted near the periphery of platten 137.

As cam follower 133 rides up cam 134 it pulls handle shroud 124 up with it by virtue of the connecting link comprising shroud support stem 132, platten 137 and cam follower stem 136.

Cam follower stem 136 can comprise a telescoped arrangement allowing relative axial rotation between two component, telescoping parts thereof.

The handle shroud 124 can comprise alternative shapes other than cylindrical, for example an oval cross section is possible although the cylindrical arrangement having a circular cross section is preferred.

The handle shroud 124 is preferably made of insulating material such as a ceramic material and is covered on an exterior surface 138, in a preferred version, with a heat reflecting material which, ideally, is also light reflecting.

In use the reflective surface 138 causes light and heat emanating from heating bank 118 to be reflected thereof whereby two functions are performed. The first function involves protecting the handle stem 130 from heat. The second function is to reflect heat and light in the direction of that portion of the preform closest to the handle stem 130 so that it is evenly heated and tends not to be shadowed by the stem 130.

In one particular form the handle shrouds 124 can be cooled by an air or nitrogen blast (not shown) directed at them whilst they are lifted clear of the preform 112. This will assist to prevent radiated and/or convected heat building up within the cavity 139 of the shroud 124.

-18-

Figs 13-23 illustrate details of a preform, mould and container blown therefrom and therein by the machine of Fig. 9. With reference to Fig. 13, in a preferred version, dimension A is greater than dimension B thereby to discourage tangling of preforms prior to loading into chute 113.

It will be observed that the top end of the handle is located close to the locating ring in this version. It will also be noted that the stem of the preform which subsequently constitutes the handle of the blown container is fully supported within the half mould during the entire blowing process. In contrast the walls of the container including portions of the container wall peripherally opposite the top end of the handle stem are free to be blown within the constraints of the mould.

With reference to Figs. 24-34 a second version of a preform, mould and resulting blown container is illustrated wherein first non-expanding region 30 is relatively long in the axial direction including a portion 140 which extends from locating ring 141 down to and around at least a top portion of the connection of the handle stem 130 thereby forming a join of the top end of handle stem 130 to locating ring 141. (Best seen in Fig. 24).

In this version there is at least partial expansion of wall portions of the preform located peripherally away from the join of the handle stem 130 to the preform 112 (best seen in Figs 32 and 34). This expansion, relatively, is not as great as the biaxial expansion occurring below the first and second non-expanding regions 30, 31. It can, however, be significant in providing strength and resistance to gas permeation in at least second non-expanding region 31, if not non-expanding region 30.

CONTAINER RESISTANT TO INTERNAL PRESSURES

With reference to Figs. 35 to 39 there is shown a container 150 incorporating an integral handle 151 which is biaxially blown from the preform 152 illustrated in Figs. 40 and 41.

In this instance, as perhaps best seen in Fig. 36, the blown container 150 includes a discontinuity region 153. In this instance the discontinuity region 153 extends the entire circumference of the container 150.

As best seen in Fig. 38 the discontinuity region 153 lies in a plane which subtends an acute angle α with a horizontal plane XX.

The plane of the discontinuity region 153 is oriented so that where it passes closest to the integral handle 151 it lies between first end 154 and second end 155 of the handle 151.

In this instance that part of the discontinuity region 153 located furthest from the handle 151 lies in the plane XX which passes through, or close to, join region 156 where the second end 155 of handle 151 is joined to container 150.

The discontinuity region 153 is formed by a substantial change in direction of the wall of the container 150, perhaps best seen in Fig. 35 wherein first tangent 157 to upper wall portion 158 intersects with second tangent 159 to lower wall portion 160 of container 150 at an obtuse angle β , thereby forming a portion of the discontinuity region 153.

This discontinuity region 153 imparts additional strength to the container walls, thereby to resist deformation of, particularly from internal pressures which can arise when the container is sealed, as for example when the container contains a carbonated beverage.

In order to assist in the creation of the discontinuity region 153 the preform 152 from which the container 150 is biaxially blown includes different wall thickness profiles, in this instance in the form of first

-20-

wall profile 161, second wall profile 162 and third wall profile 163 separated one from the other by first transition zone 164 and second transition zone 165 as best seen in Fig. 40.

5 It will be observed that the wall thickness of third wall profile 163 is greater than the wall thickness of second wall profile 162 which, in turn, is greater than the wall thickness of first wall profile 161.

10 The second end 155 of the handle 151 is joined to the container during a biaxial blowing operation by deflation and envelopment about the second end 155. The second end 155 can include a bulbous portion including a bulbous portion of the types illustrated in Fig. 2.

15 The preform 152 can be manufactured from PET materials in an injection moulding operation as described earlier in this specification.

20 The preform 152 is then blown as a second stage operation in a stretch blow moulding machine so that its walls conform to the inside surfaces of a mould, also as described earlier in this specification.

TAG CONNECTED HANDLE

With reference to Fig. 42 and Fig. 43 an alternative version of the container and the preform from which it is constructed are illustrated.

25 With reference to Fig. 42 the container 201 includes an integral handle 202 as previously described and constructed, save that the connection to the lower end of the container 201 is formed as an integral connection by way of a tag 203 which extends from a lower edge 204 of a wide part of the handle 202 down to a mid circumferential portion 205 of container 201 at which point it is
30 integrally connected thereto. The lower edge 204 of the wide part of the handle 202 includes a landing portion 206 which merely rests on the surface of the container 201 at this point rather than being integrally connected thereto
35 or otherwise connected thereto at this point.

-21-

5 A preform 207 from which the container 201 of Fig. 42 is blown is illustrated in Fig. 43. This preform 207 is constructed substantially in the same manner as that illustrated in Fig. 40 except that lower edge 204 of handle 202 is integrally connected to the preform 207 by way of tag 203 in the manner illustrated in Fig. 43.

The preform 207 is blown to form the container of Fig. 42 utilising the process previously described with reference to Figs. 10, 11 and 12.

10 The above describes only some embodiments of the present invention and modifications obvious to those skilled in the art can be made thereto without departing from the scope and spirit of the present invention.

INDUSTRIAL APPLICABILITY

15 Embodiments of the invention are applicable to the manufacture of containers made from orientable thermoplastics material and incorporating a handle or like grasping fixture as an integral component of the container.

-22-

CLAIMS

1. A preform for a container comprised of orientable thermoplastic material and arranged so that the resultant blown container will include a handle or like support structure; said preform comprising a moulded structure having a neck portion and an expandable portion below the neck, said neck including a locating ring above the expandable portion and a solid stem of orientable thermoplastics material projecting from the preform and moulded integrally therewith which when the container is formed constitutes the handle.
2. A method of forming a container having an integral handle; said method comprising:
 - (a) forming a preform having a neck portion and an expandable portion below the neck portion, said neck portion including a locating ring above the expandable portion and a solid stem of orientable thermoplastics material projecting from the preform and moulded integrally therewith, and
 - (b) performing a blow moulding operation on said preform to expand the expandable portion to form the body of the container.
3. The method of claim 2 wherein the neck portion and integral handle are subjected to a crystallisation step.
4. The method of claim 2 wherein the blow moulding operation includes supporting the stem whilst the preform is blown in a manner whereby at least a portion of the external side of the tube expands to encircle at least a lower portion of the stem so as to form an enclosed grip portion between the external side and the solid stem.
5. The method of claim 4 wherein the enclosed grip portion allows at least two fingers of the adult human hand to pass therethrough.

-23-

6. The method of claim 2 wherein the stem is formed so as to have an I-shaped cross-section at least throughout that portion of the stem where it projects from the external side of said tube.
7. A parison for an injection stretch blow moulding process, said parison formed by an injection process including two separate points of injection.
8. The parison of claim 7 wherein a first point of injection permits injection of non-recycled PET or like thermoplastics material.
9. The parison of claim 7 or 8 wherein a second point of injection permits injection of PET or like thermoplastics material incorporating at least a portion of recycled material.
10. The parison of claim 7 or 8 wherein said first point of injection is for the formation of that part of the parison which will be stretched during a stretch blow moulding operation on the parison.
11. The parison of claim 9 wherein said second point of injection is for the formation of those parts of said parison which will remain unexpanded or substantially unexpanded in a stretch blow moulding operation on said parison.
12. A container manufactured from a two stage injection stretch blow moulding process, said container including a graspable handle affixed at at least a first point and a second point to said container so as to form an enclosed area between the handle and the bottle and through which the fingers of a human hand may be passed.
13. The container of claim 12 wherein said first point of connection comprises an integral connection between the handle and the container and is formed in said first step of said two step operation.
14. The container of claim 13 wherein said second point of connection is formed during said second step of said two step operation.

-24-

15. The container of claim 14 wherein said handle at said second point of interconnection includes a bulbous portion adapted to be at least partially enfolded by a portion of said container as it is blown during said second step of said two step operation whereby a mechanically interlocked connection is formed at said second point of connection of said handle to said container.
16. The container of claim 15 wherein said bulbous portion comprises one of an upwardly extending hook, a downwardly extending hook, a bulb or a combination of one or more thereof.
17. The container of any one of claims 12 to 16 wherein an adhesive is utilised to assist connection at said second point of interconnection.
18. The preform of Claim 1 further including a locating ring immediately below which is a first non-expanding region and a second non-expanding region.
19. The preform of Claim 18 wherein the first non-expanding region is formed so as to be slightly raised or otherwise differentiated from the expandable portion of parison.
20. The preform of Claim 18 or 19 wherein the second non-expanding region is not differentiated from the expandable portion of parison.
21. The preform of any one of Claims 18-20 wherein the stem includes a first rib integrally moulded with and extending from locating ring.
22. The preform of Claim 21 which also includes a second rib integrally moulded with and extending from said second non-expanding region.
23. The preform of Claim 22 which further includes a rib connector integrally moulded with and extending from first non-expanding region and forming a continuous connection between said first rib and said second rib throughout the length of said stem.

-25-

24. The preform of any one of Claims 18-23 and wherein said second non-expanding region forms part of a temperature transition zone.
25. The preform of any one of Claims 18-24 and wherein said first non-expanding region forms part of said temperature transition zone.
26. The preform of Claim 24 or Claim 25 wherein deformation of said temperature transition zone takes place during a stretch blow moulding process.
27. The preform of any one of Claims 18-26 manufactured by a two stage injection moulding process wherein material is injected at different locations in the die to form a preform adapted to be composed from more than one type of material.
28. The preform of Claim 27 wherein during at least one stage of said two stage process an inner wall and outer wall of said preform is formed, said inner wall adapted to be made from a different material from said outer wall.
29. A container stretch blow moulded from the preform of any one of claims 18-28.
30. A container made from PET material and stretch blow moulded from the preform of any one of Claims 18-29.
31. A container comprised of biaxially orientable thermoplastic material manufactured from a two stage injection stretch blow moulding process, said container including a graspable handle affixed at at least a first point and a second point to said container so as to form an enclosed area between the handle and the bottle and through which the fingers of a human hand may be passed.
32. The container of claim 31 wherein said first point comprises an integral connection between the handle and the container and is formed in said first step of said two step operation.
33. The container of claim 31 or claim 32 wherein said second point of connection is formed during said second step of said two step operation.

-26-

34. The container of claim 33 wherein said handle at said second point of interconnection includes a bulbous portion adapted to be at least partially enfolded by a portion of said container as it is blown during said second step of said two step operation whereby a mechanically interlocked connection is formed at said second point of connection of said handle to said container.
35. The container of claim 34 wherein said bulbous portion comprises one of an upwardly extending hook, a downwardly extending hook, a bulb or a combination of one or more thereof.
36. The container of any one of claims 31 to 35 wherein an adhesive is utilised to assist connection at said second point of interconnection.
37. The container of any one of claims 31 to 36 further including a locating ring at a neck portion thereof immediately below which is a first non-expanding region.
38. The container of claim 37 further including a second non-expanding region below said locating ring.
39. The container of Claim 37 or Claim 38 wherein the first non-expanding region is formed so as to be slightly raised or otherwise differentiated from the expandable portion of parison.
40. The container of Claim 37 or Claim 38 wherein the second non-expanding region is not differentiated from the expandable portion of parison.
41. The container of any one of Claims 31-40 wherein said handle includes a first rib integrally moulded with and extending from said locating ring.
42. The container of Claim 41 wherein said handle includes a second rib integrally moulded with and extending from said second non-expanding region.
43. The container of Claim 41 or Claim 42 which further includes a rib connector integrally moulded with and extending from said first non-expanding region and forming a continuous connection between said first rib

-27-

- and said second rib throughout the length of said handle.
44. The container of any one of Claims 31-43 and wherein said second non-expanding region forms part of a temperature transition zone.
 45. The container of any one of Claims 31-44 and wherein said first non-expanding region forms part of said temperature transition zone.
 46. The container of any one of Claims 31-45 wherein deformation of said temperature transition zone takes place during a stretch blow moulding process.
 47. The container of any one of Claims 31-46 manufactured by a two stage injection moulding process wherein material is injected at different locations whereby said container is composed from more than one type of material.
 48. The container of Claim 47 wherein during at least one stage of said two stage process an inner wall and outer wall of said preform is formed, said inner wall adapted to be made from a different material from said outer wall.
 49. A method of production of an integral handle PET container including the step of shrouding a handle stem portion of a preform during preheating of said preform preparatory to a stretch blow moulding step.
 50. The method of Claim 49 wherein the handle stem is fully supported in a mould cavity against movement during the stretch blow moulding operation.
 51. A container comprised of biaxially orientable thermoplastic material manufactured from a two stage injection stretch blow moulding process; said two stage process comprising a first stage in which a preform is manufactured and a second stage in which said preform is reheated and biaxially stretched to form said container; said container including a graspable handle affixed at at least a first point of connection and a second point of connection to said container so as to form an enclosed area between said handle and said container and through which at least

-28-

- two fingers of a human hand can pass; and wherein said first point of connection comprises an integral connection between the handle and the container and is formed in said first stage of said two stage process.
52. The container of claim 51 wherein said second point of connection is formed during said second stage of said two stage process.
53. The container of claim 52 further including a locating ring at a neck portion thereof.
54. The container of claim 53 wherein said handle at said second point of connection includes a bulbous portion which is at least partially enfolded by a portion of said container as it is blown during said second stage of said two stage process whereby a mechanically interlocked connection is formed at said second point of connection of said handle to said container.
55. The container of claim 54 wherein said bulbous portion comprises one of an upwardly extending hook, a downwardly extending hook, a bulb or a combination of one or more thereof.
56. The container of claim 55 wherein an adhesive is utilised to assist connection at said second point of connection.
57. The container of claim 54 further including a first non-expanding region immediately below said locating ring.
58. The container of claim 57 further including a second non-expanding region below said first non-expanding region.
59. The container of claim 57 wherein said first non-expanding region is formed so as to be slightly raised or otherwise differentiated from that portion of said container which is fully biaxially oriented during said second stage of said two stage process.
60. The container of claim 58 wherein said second non-expanding region is not differentiated from that portion of said container which is fully biaxially oriented during said second stage of said two stage process.

-29-

61. The container of claim 58 or claim 59 wherein minor expansion of said second non-expanding region takes place during said second stage of said two stage process.
62. The container of claim 58 wherein said handle includes a first rib integrally moulded with and extending from said locating ring.
63. The container of claim 62 wherein said handle includes a second rib integrally moulded with and extending from said second non-expanding region.
64. The container of claim 63 which further includes a rib connector integrally moulded with and extending from said first non-expanding region and forming a continuous connection between said first rib and said second rib throughout the length of said handle.
65. The container of claim 58 wherein said second non-expanding region forms part of a temperature transition zone.
66. The container of claim 57 wherein said first non-expanding region forms part of a temperature transition zone.
67. The container of claim 66 wherein deformation of said temperature transition zone takes place during a stretch blow moulding process.
68. The container of claim 51 manufactured by said two stage injection moulding process and wherein material is injected at different locations during formation of said preform during said first stage of said two stage process whereby said container can be composed from more than one type of material.
69. The container of claim 68 wherein during said first stage of said two stage process an inner wall and outer wall of said preform is formed, said inner wall made from a different material from said outer wall.
70. The container of any one of claims 51-69 further including a discontinuity region as defined in the specification.
71. The container of Claim 70 wherein said discontinuity region lies in a plane which lies at an acute angle to

-30-

- the horizontal, said discontinuity region extending substantially throughout the circumference of said container.
72. The container of any one of Claim 70 or Claim 71 wherein said discontinuity region at its point closest to said handle is located between a first end and a second end of said handle.
73. A preform from which the container of any one of Claims 51 to 72, said preform including more than one wall profile.
74. The preform of Claim 73 wherein said preform has a first wall profile closest to its neck followed by a second wall profile immediately there below and separated therefrom by a first transition zone.
75. The preform of Claim 74 wherein said preform further includes a third wall profile immediately below said second wall profile and separated therefrom by a second transition zone.
76. The container of any one of claims 31 to 38 wherein said graspable handle is affixed at said second point by way of a tag.
77. The container of claim 76 wherein said tag extends from a lower edge of a wide portion of said handle and is integrally connected at a mid circumferential portion of said container.
78. The container of claim 76 or 77 wherein said lower edge of said wide portion of said handle includes a landing portion which rests on but is not otherwise connected to or enveloped by an outer surface of said container.
79. A preform from which the container of any one of claims 76 to 78 is blown, said preform including a tag extending from a lower edge of a handle portion of said preform; said tag being integrally connected to said preform.

1/31

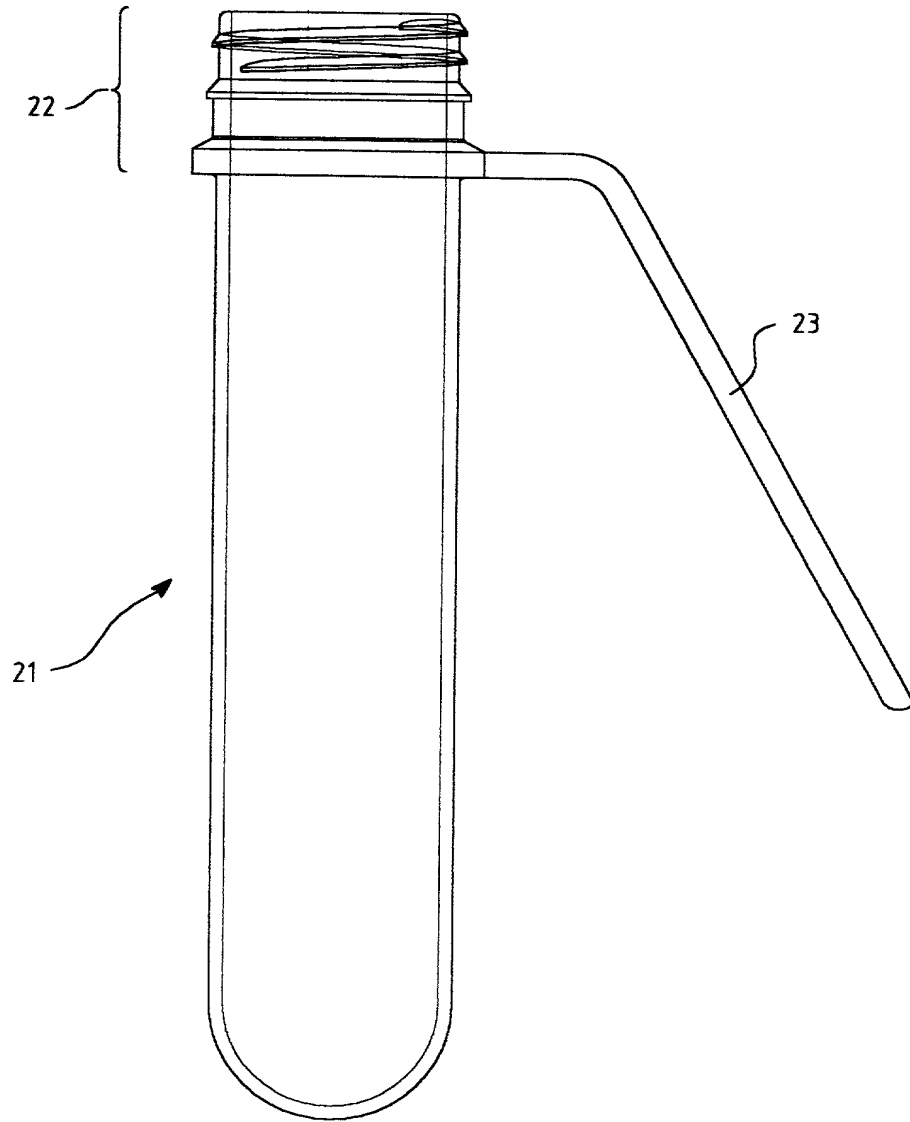


Fig. 1
Prior Art

2/31

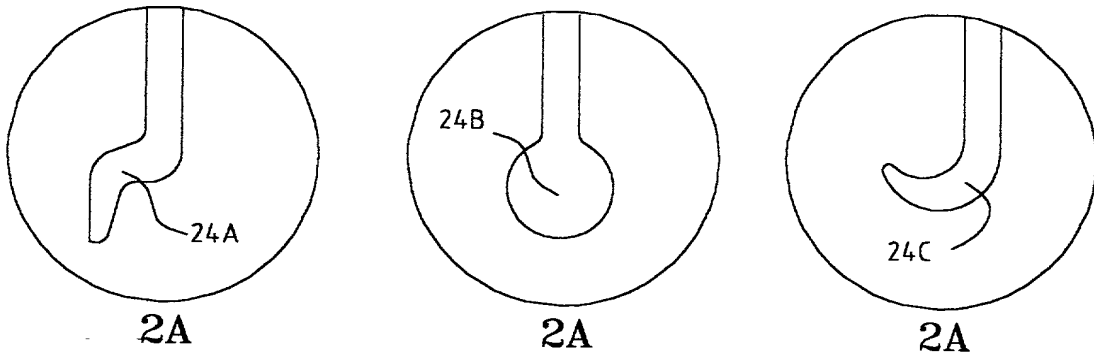
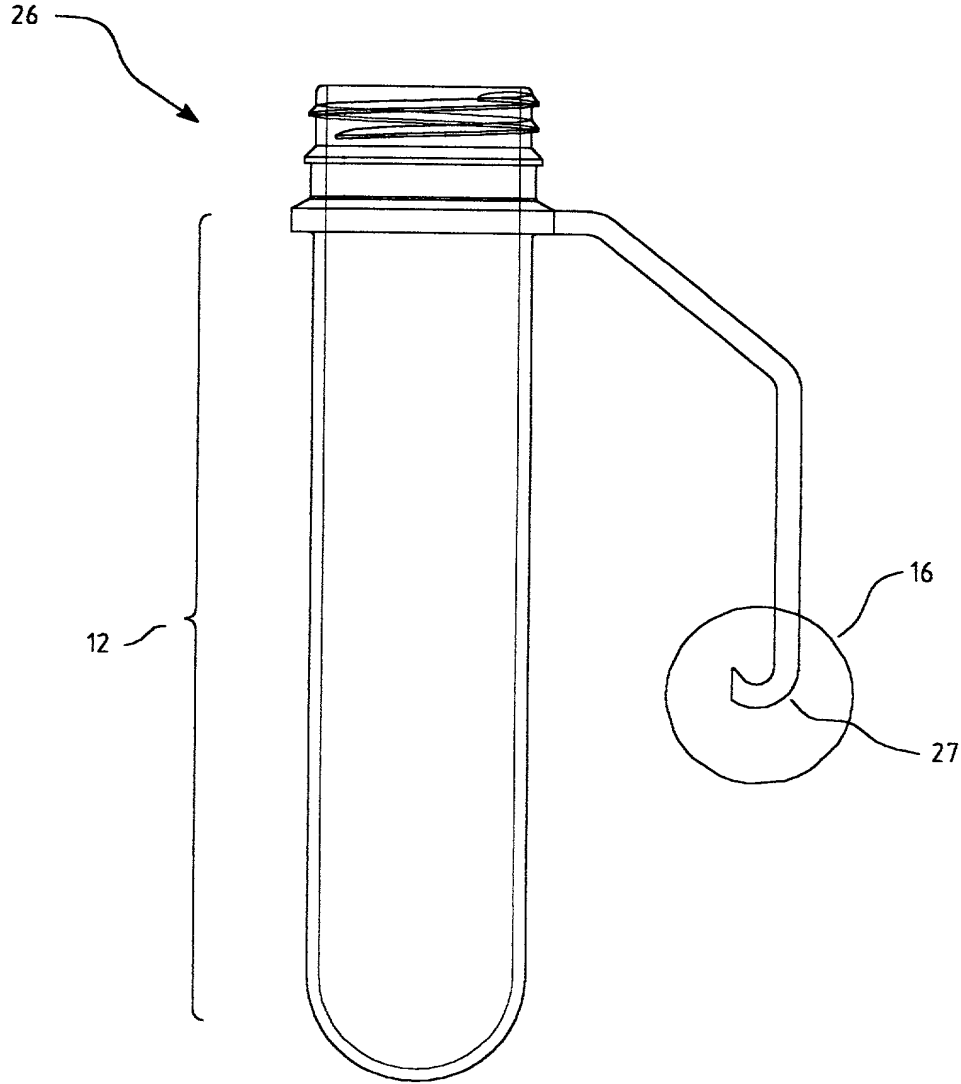


Fig. 2

3/31

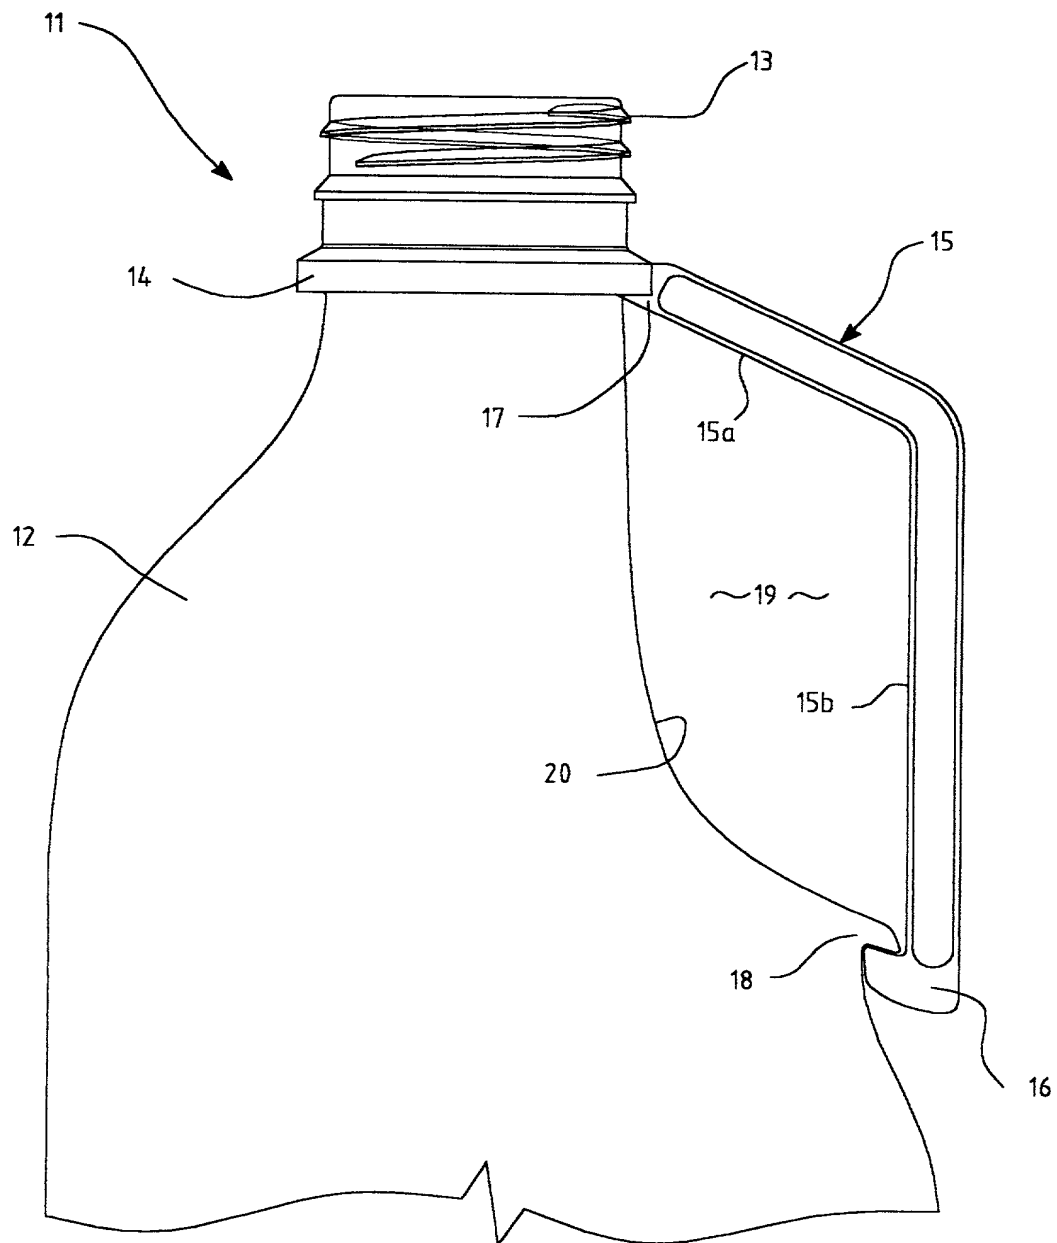


Fig. 3

4/31

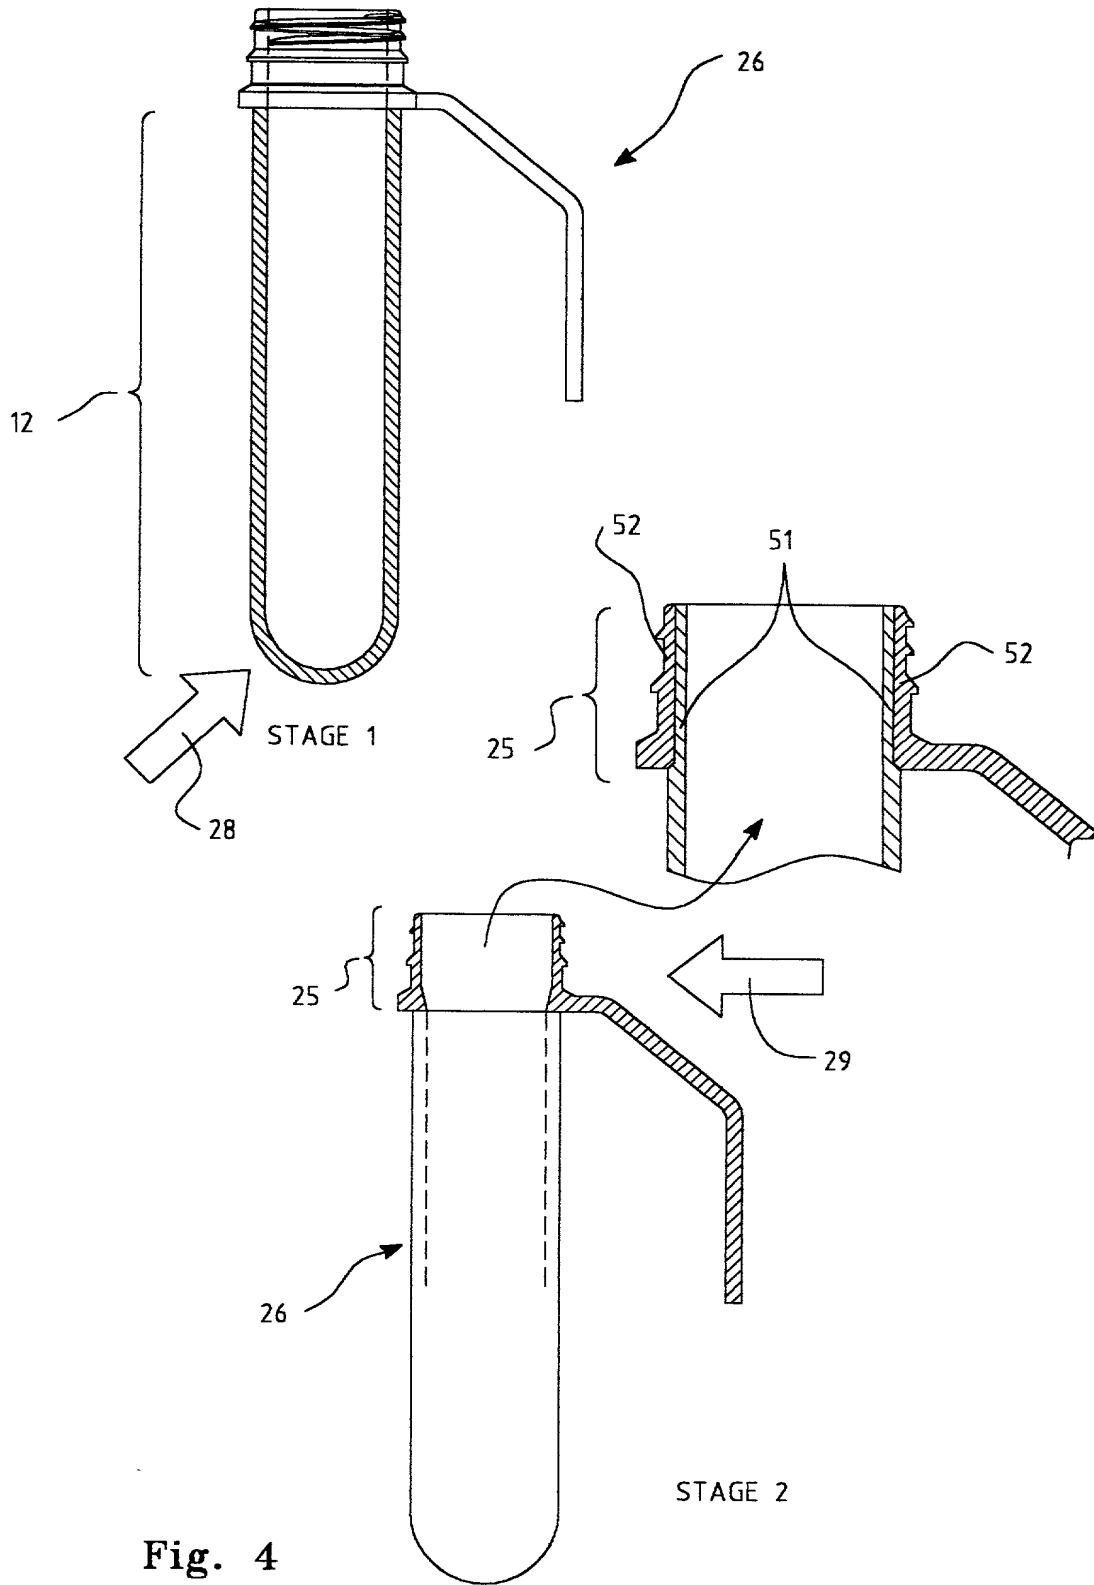


Fig. 4

5/31

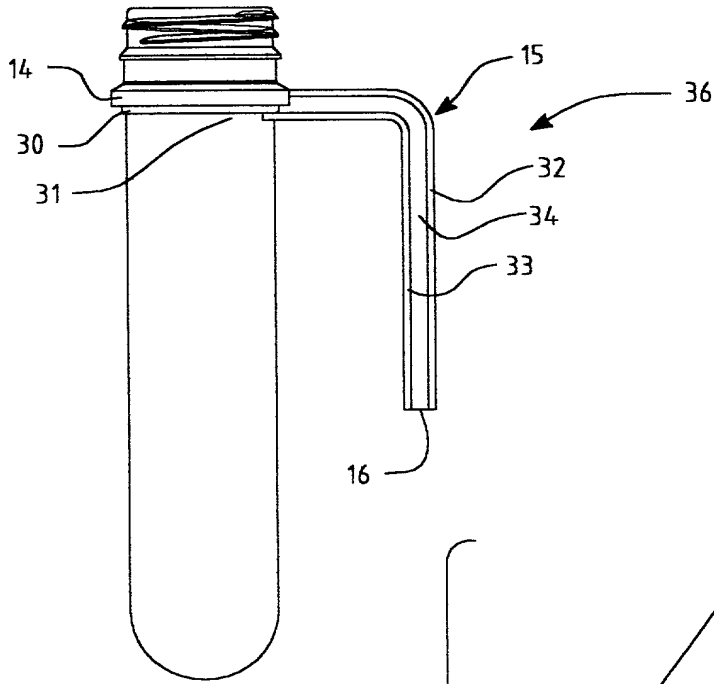


Fig. 5A

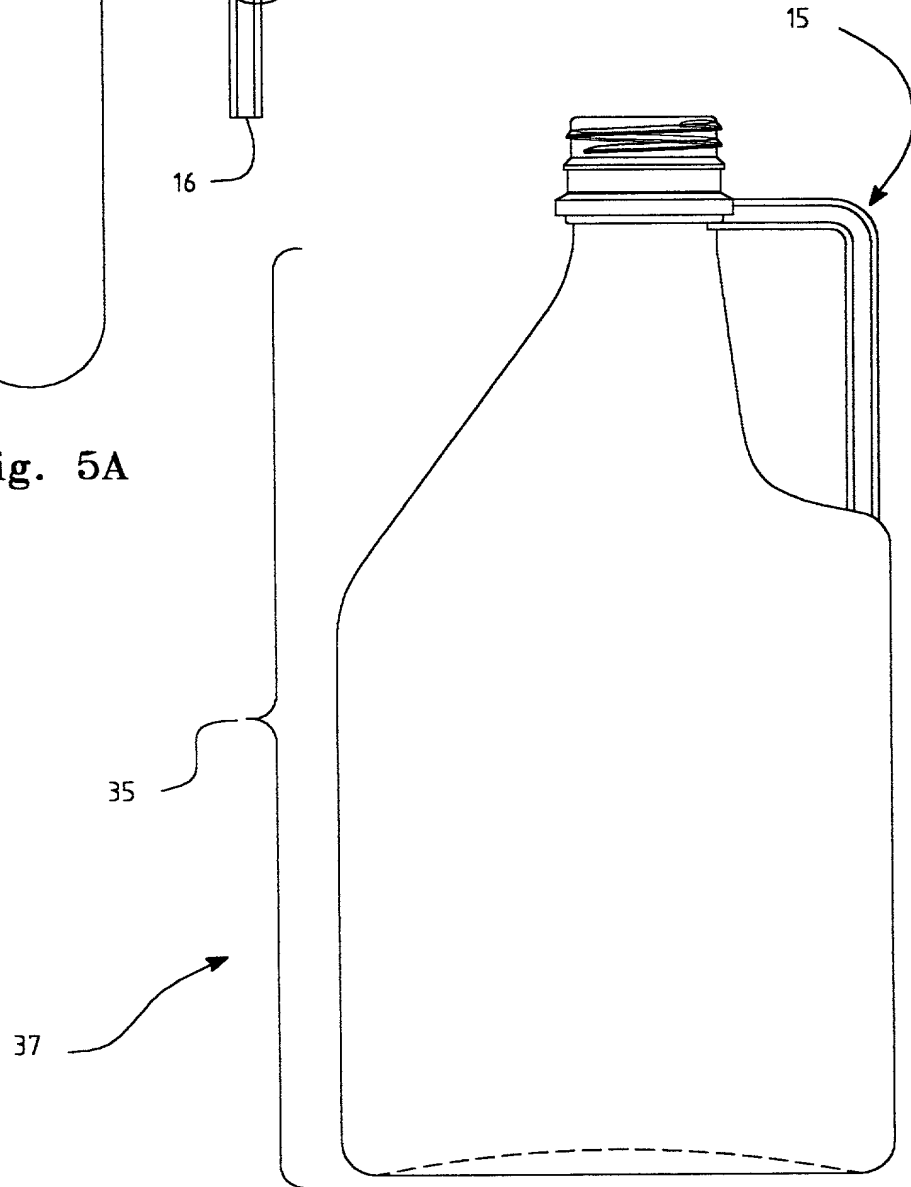


Fig. 5B

6/31

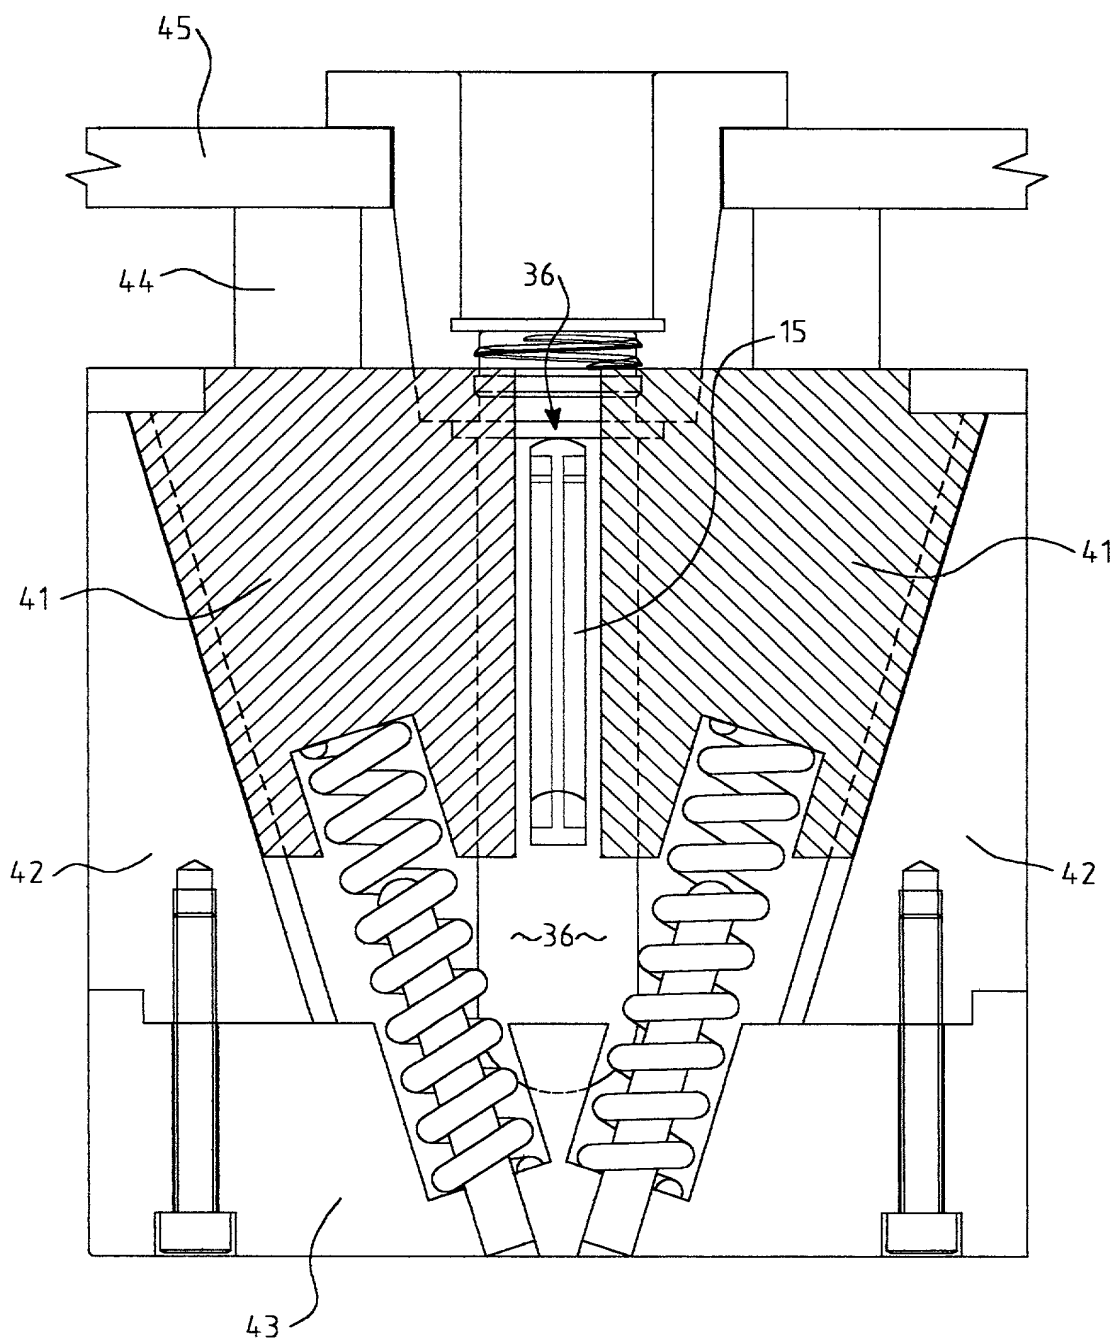


Fig. 6

7/31

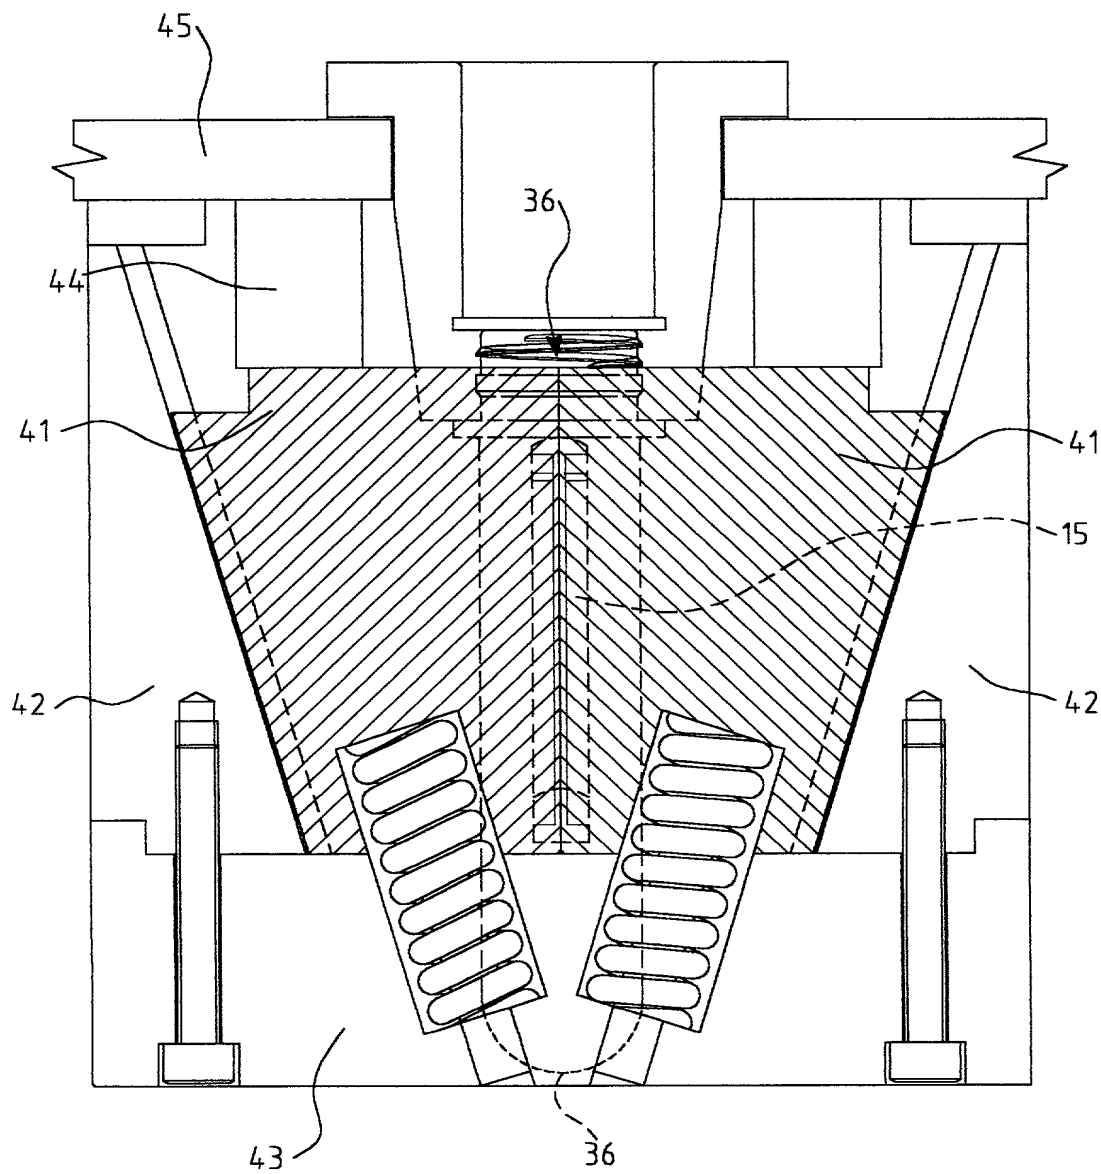


Fig. 7

8/31

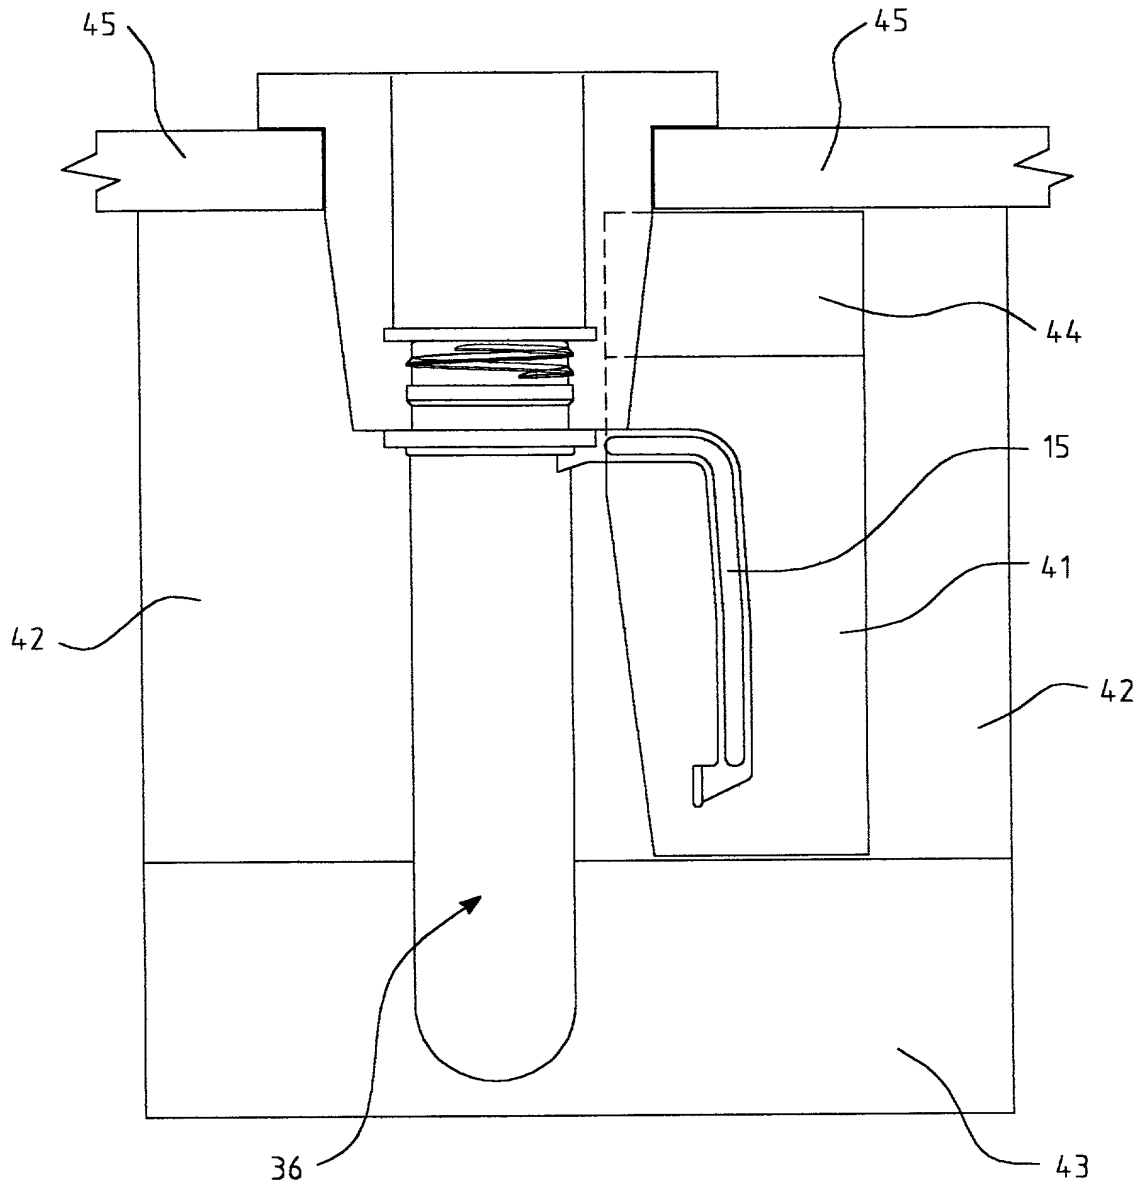


Fig. 8

9/31

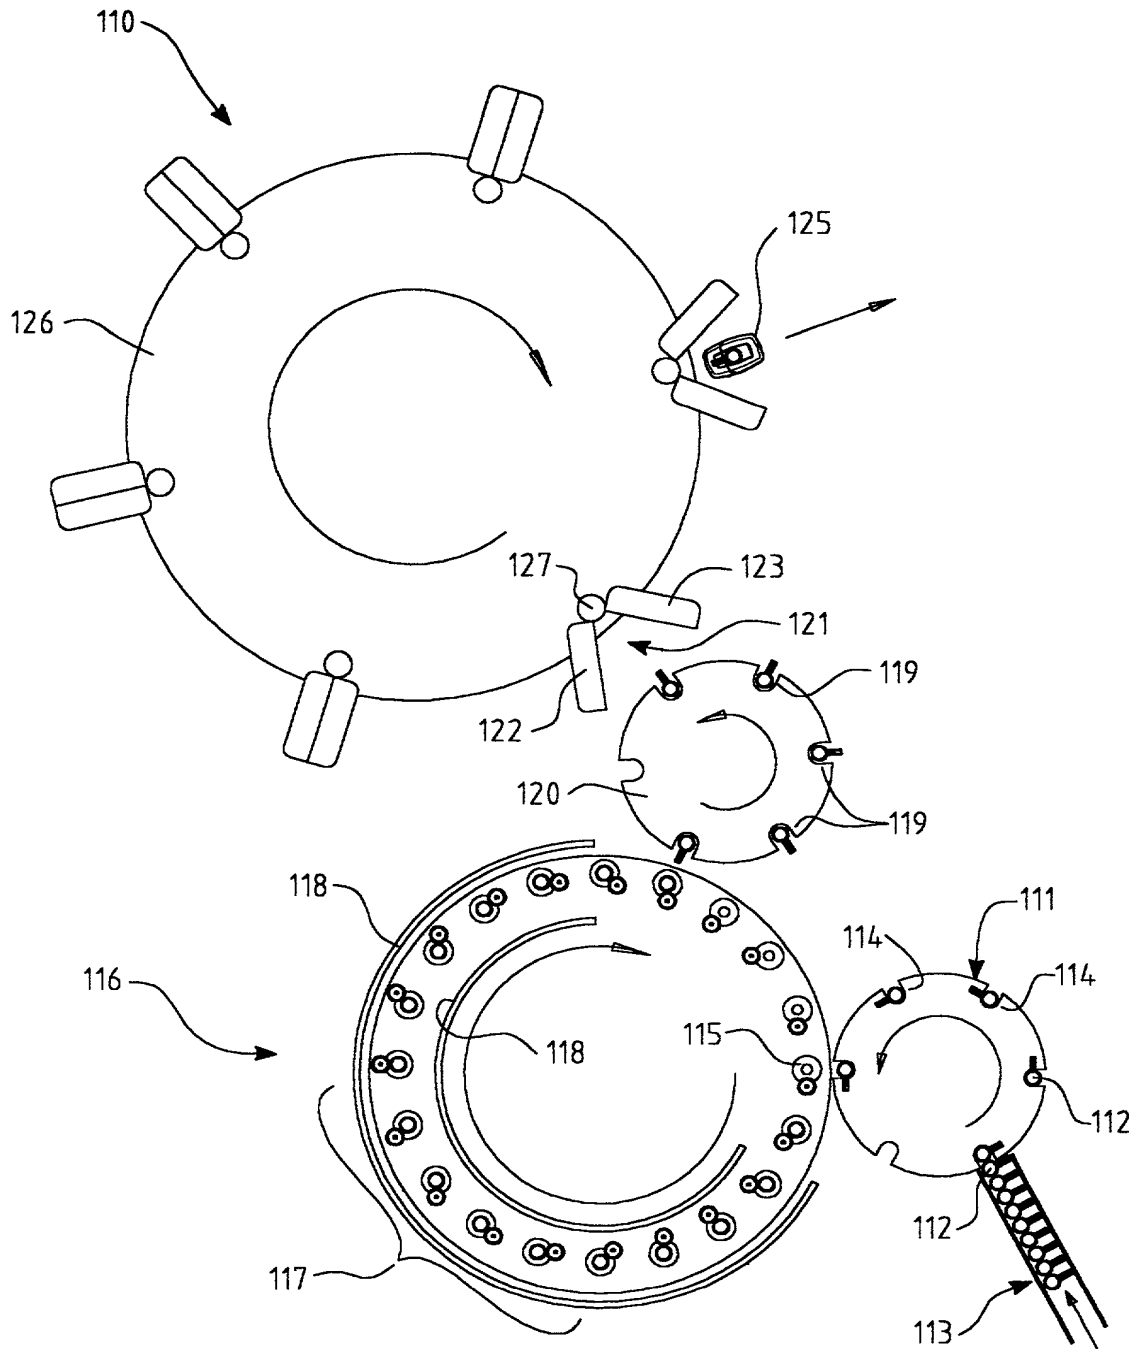


Fig. 9

10/31

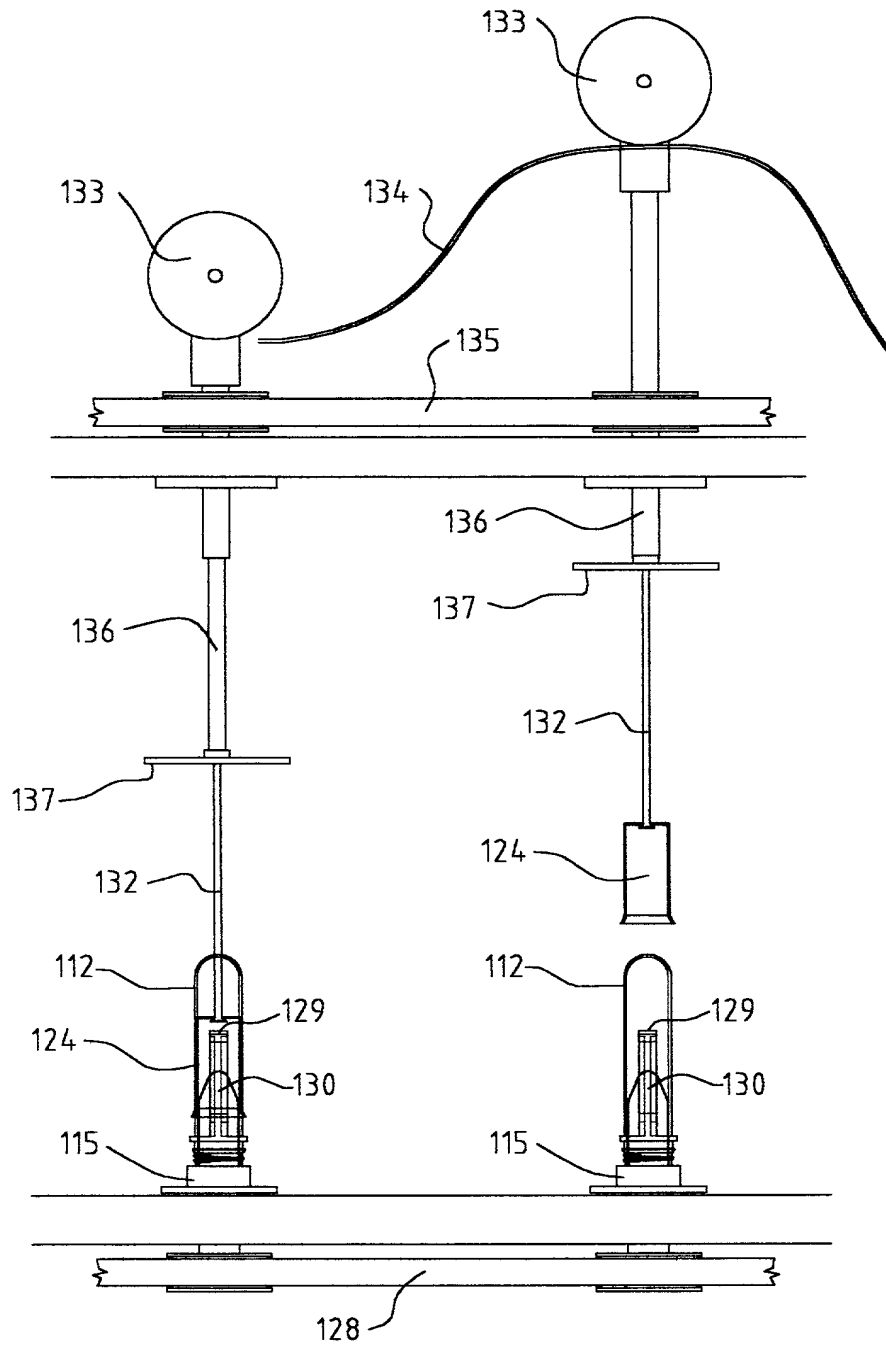


Fig. 10

11/31

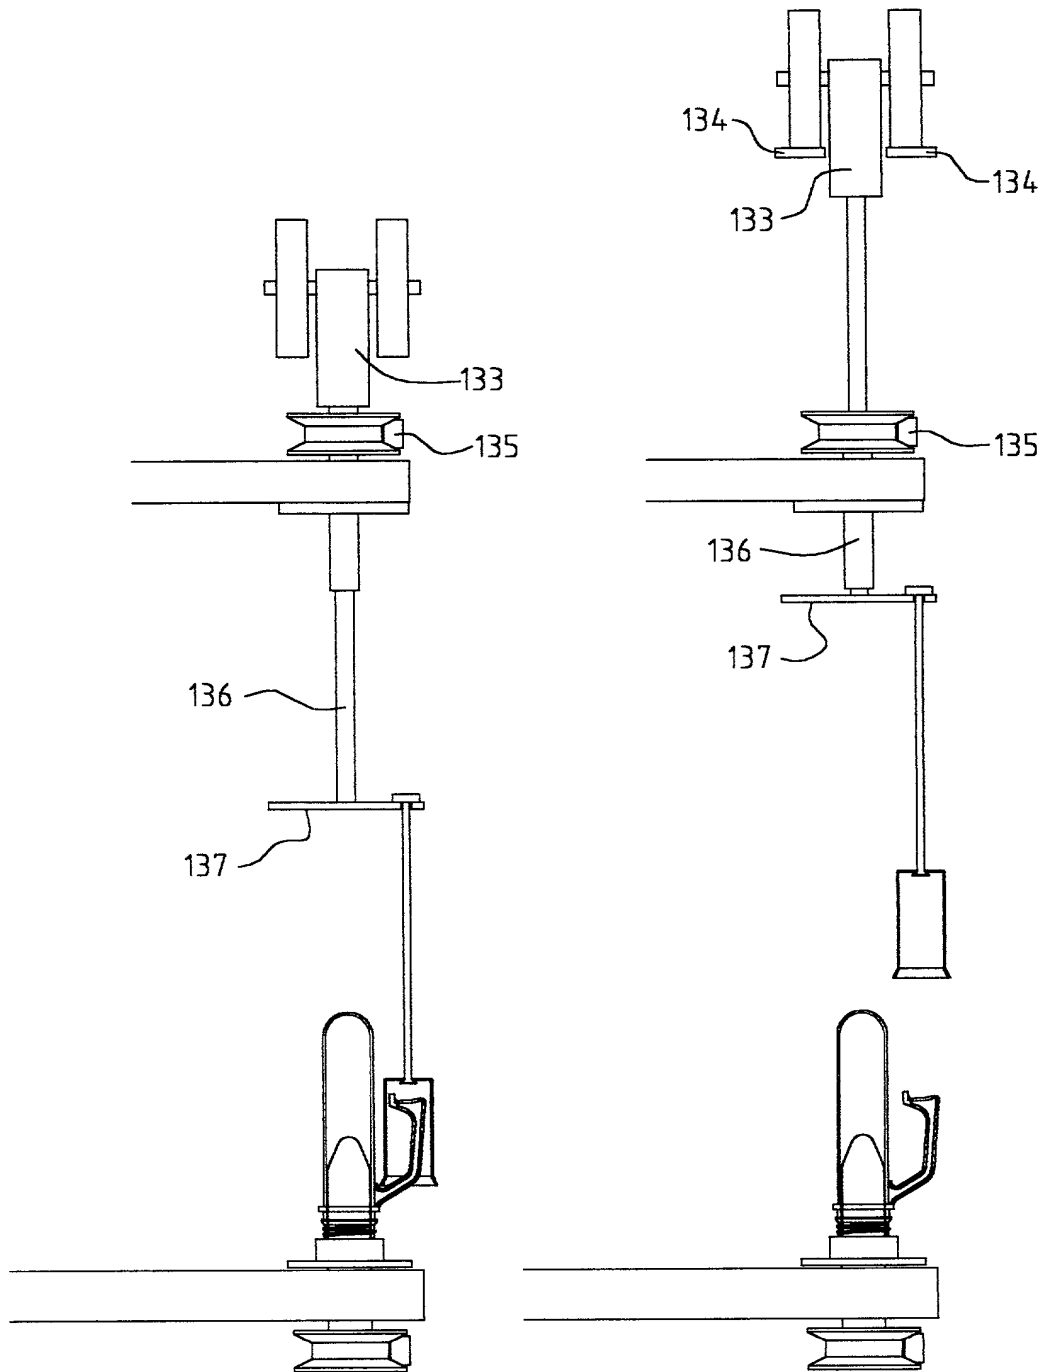


Fig. 11

12/31

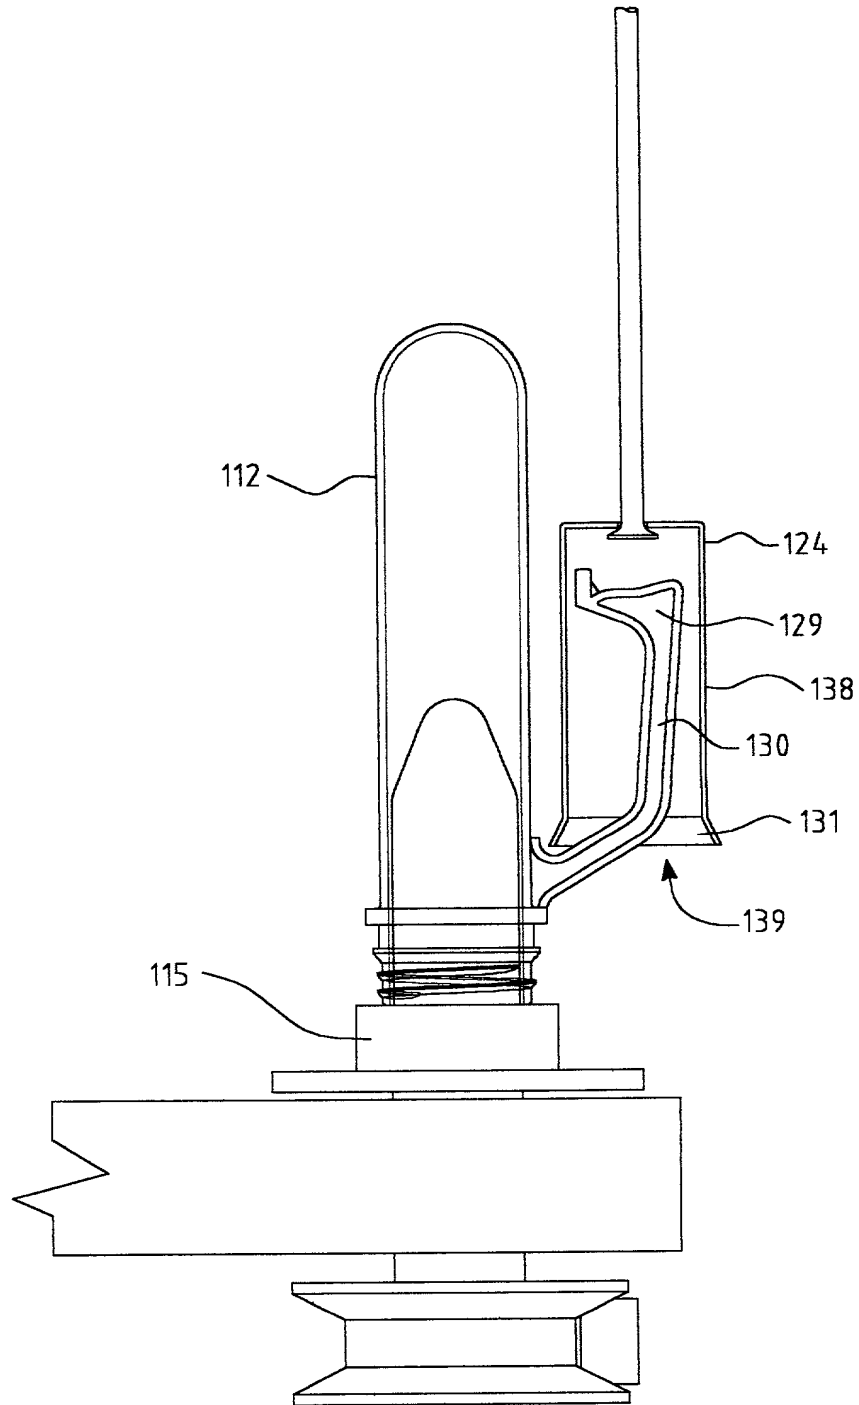


Fig. 12

13/31

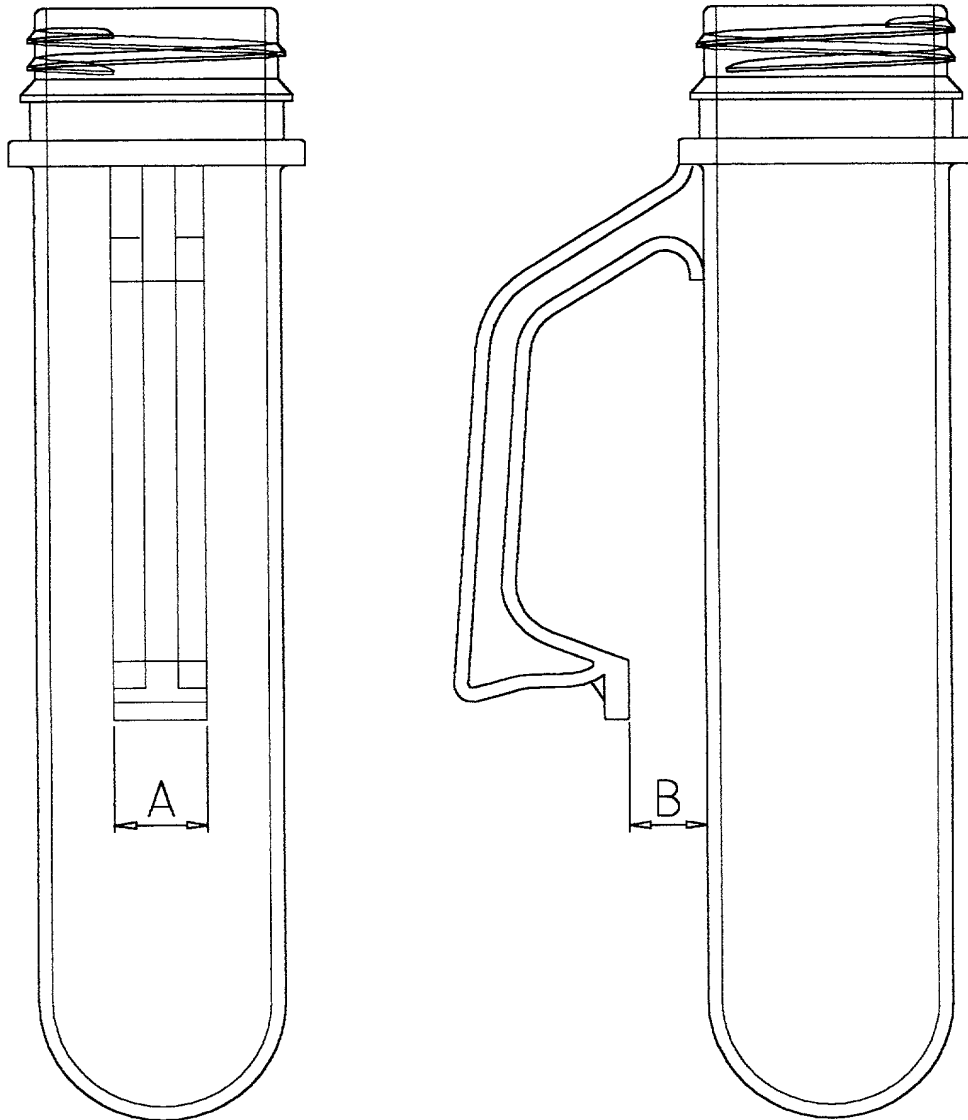


Fig. 13

14/31

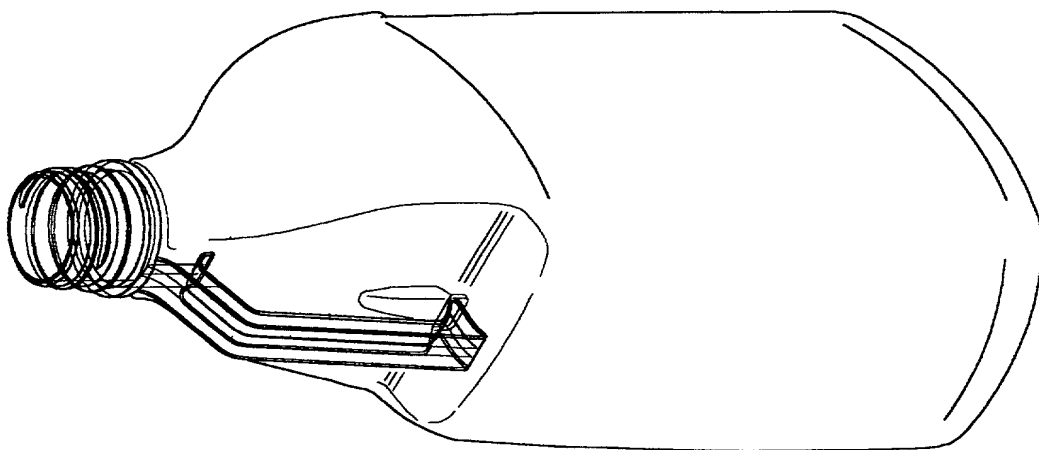


Fig. 15

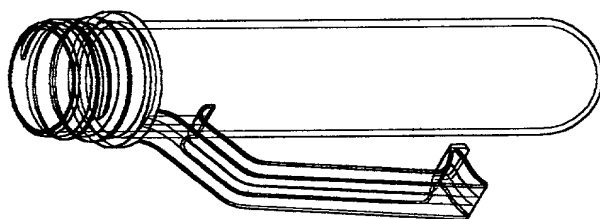


Fig. 14

15/31

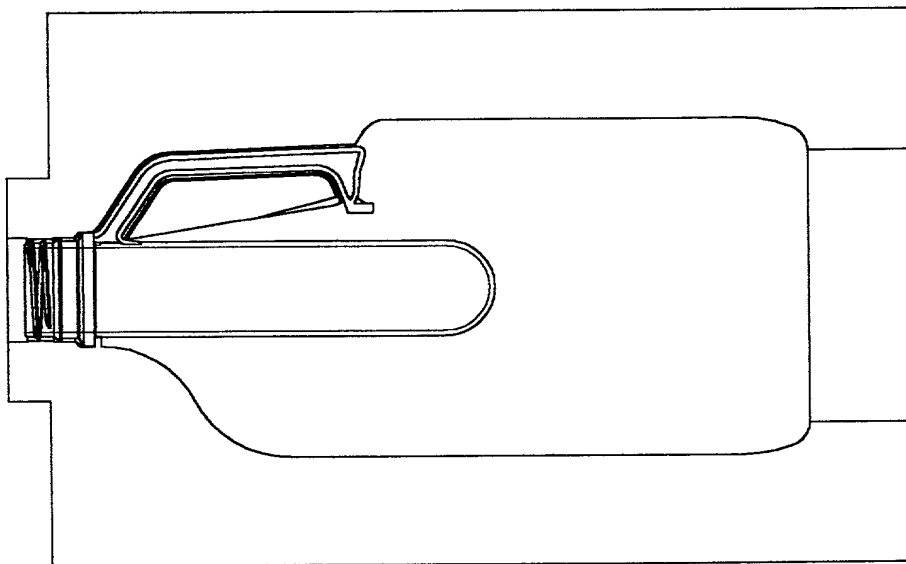


Fig. 17

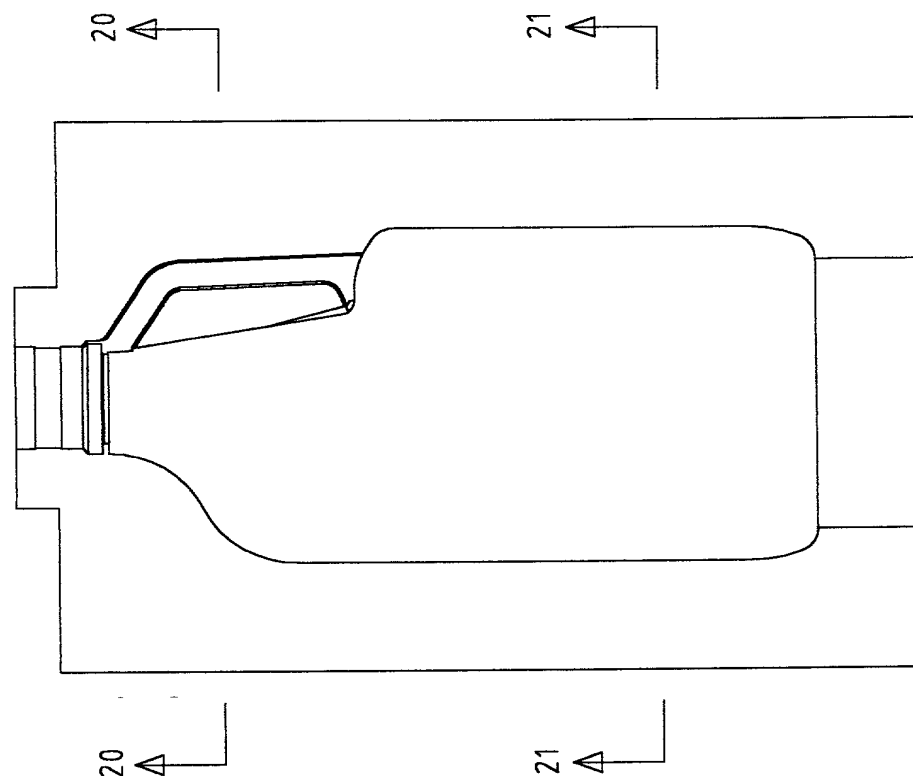


Fig. 16

16/31

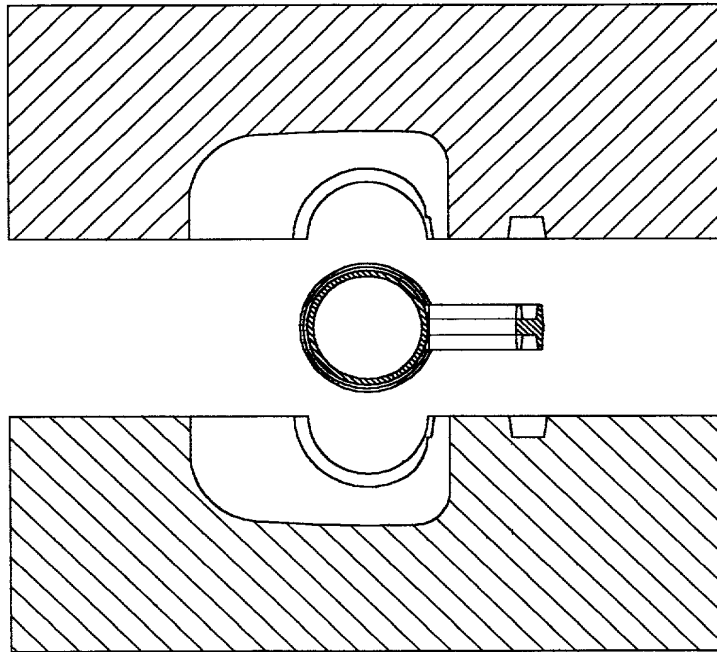


Fig. 18

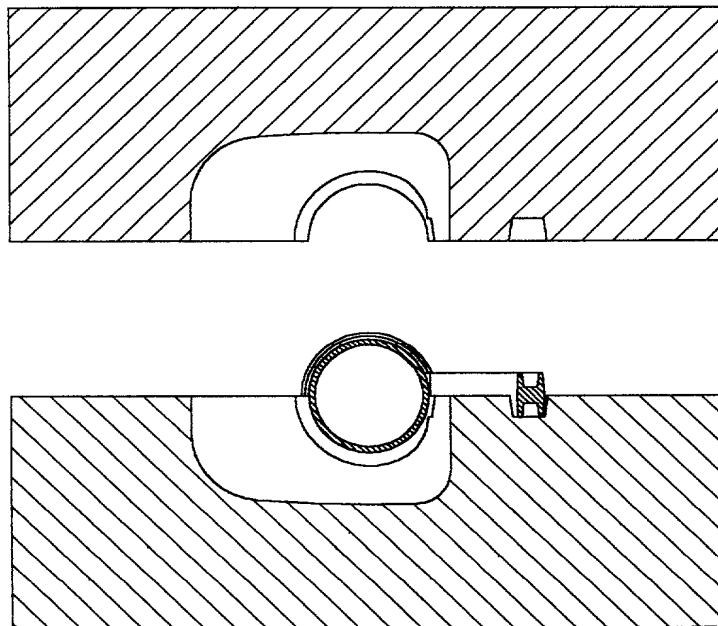


Fig. 19

17/31

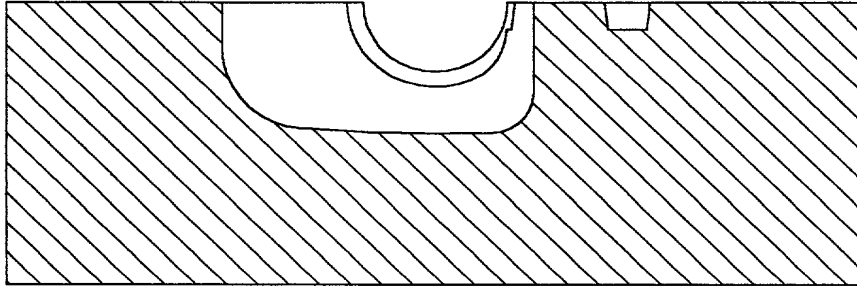


Fig. 20

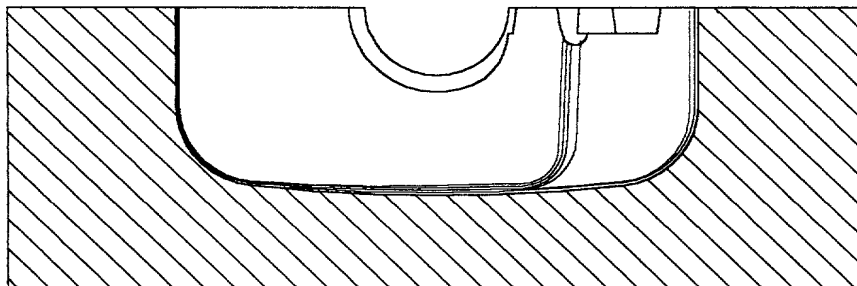


Fig. 21

18/31

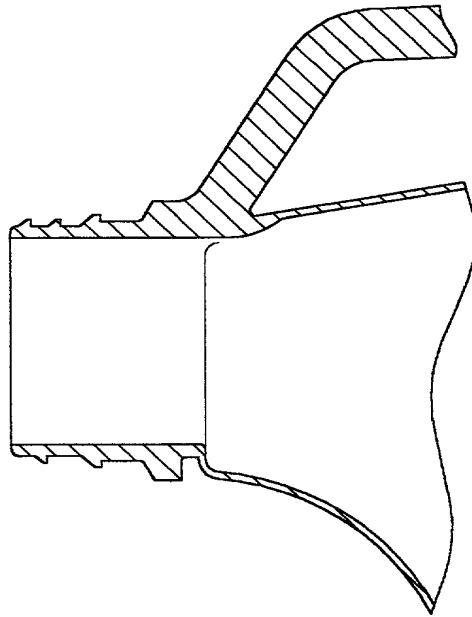


Fig. 23

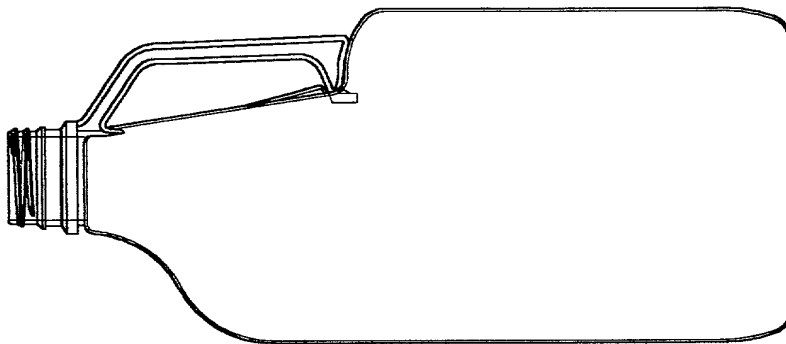


Fig. 22

19/31

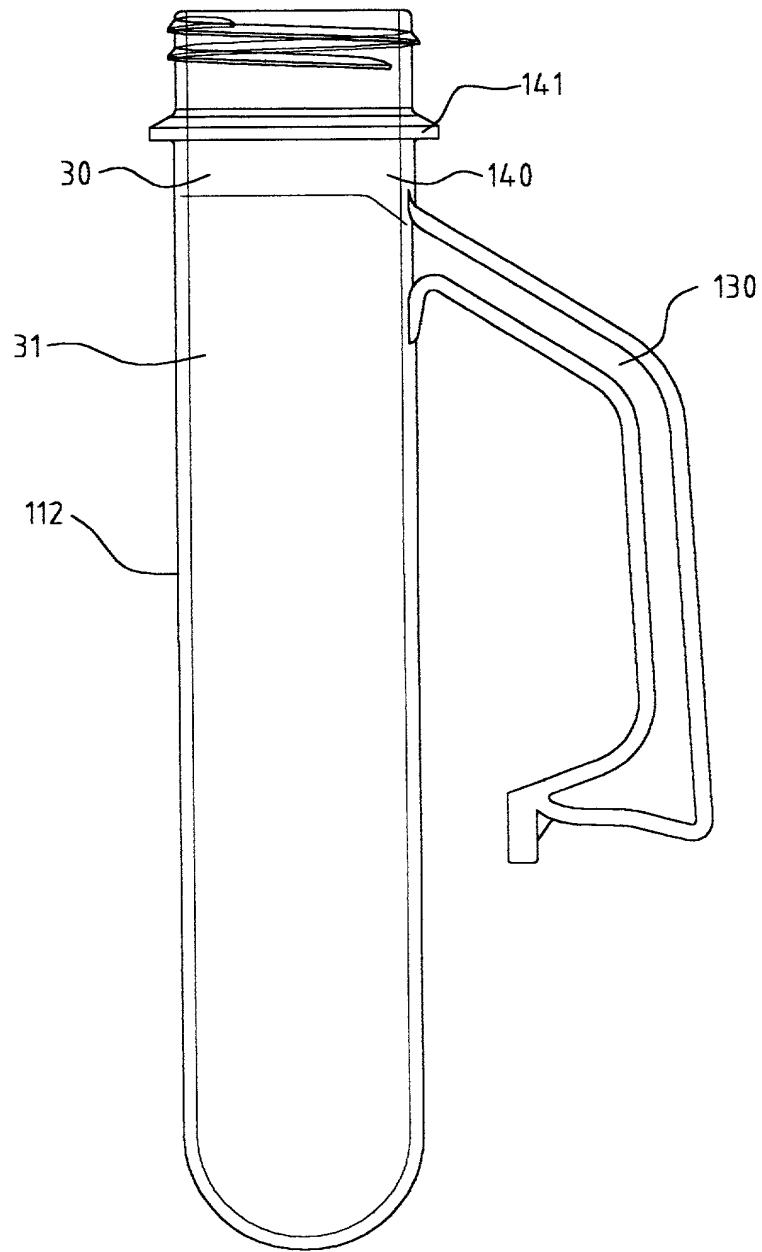


Fig. 24

20/31

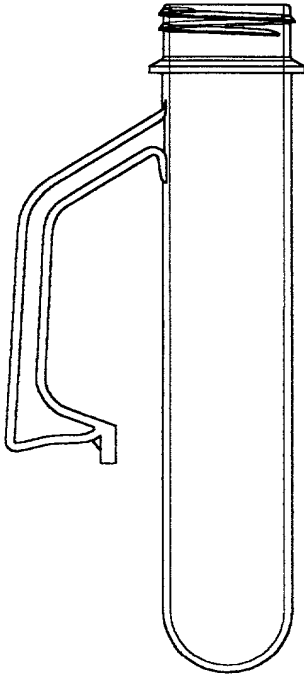


Fig. 25

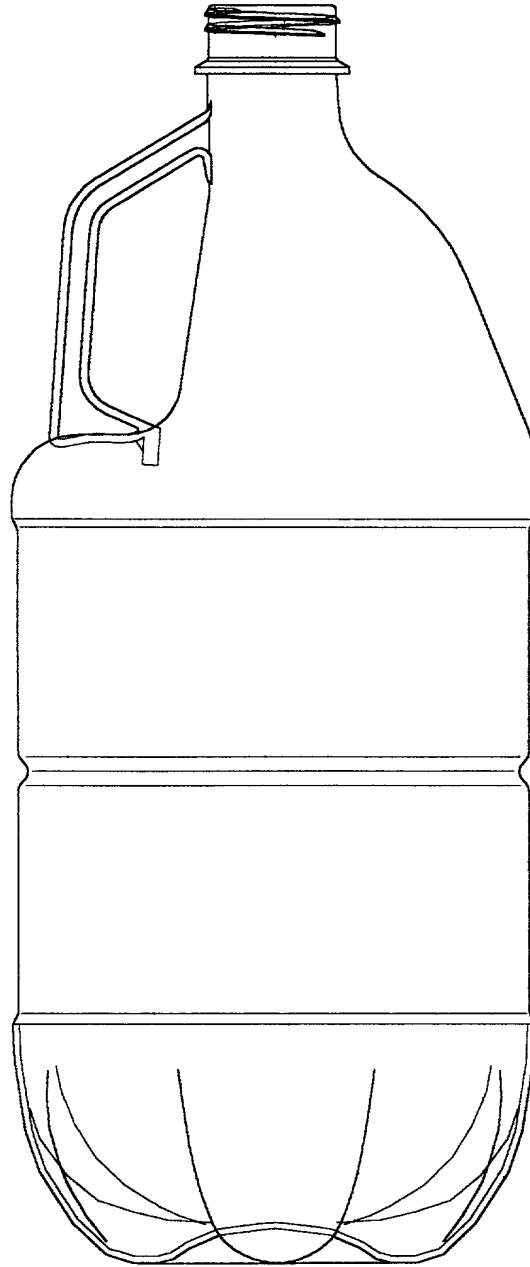


Fig. 26

21/31

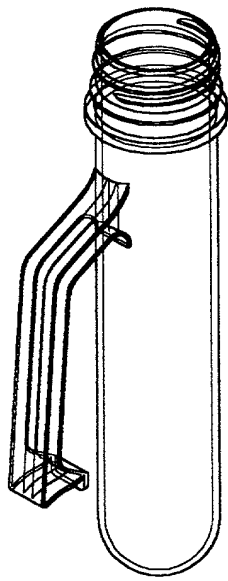


Fig. 27

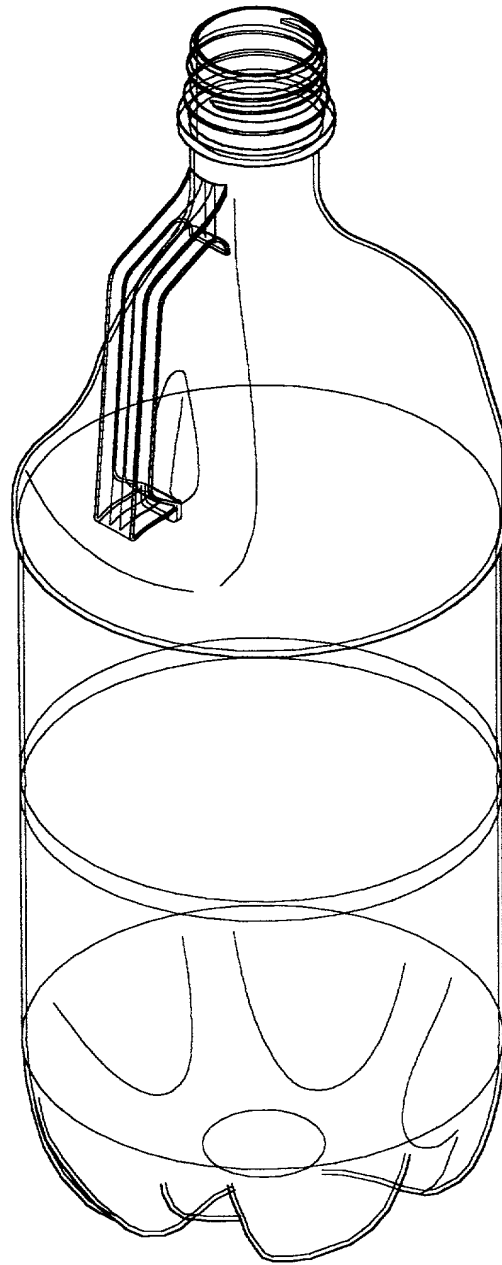


Fig. 28

22/31

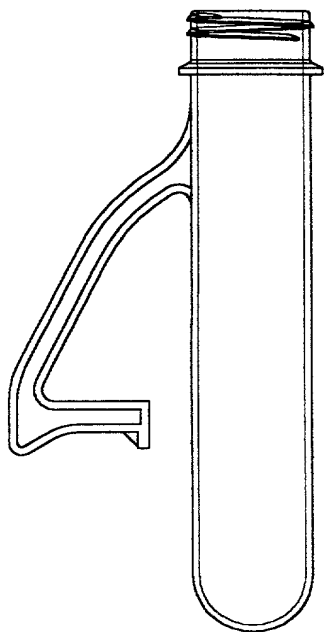


Fig. 29

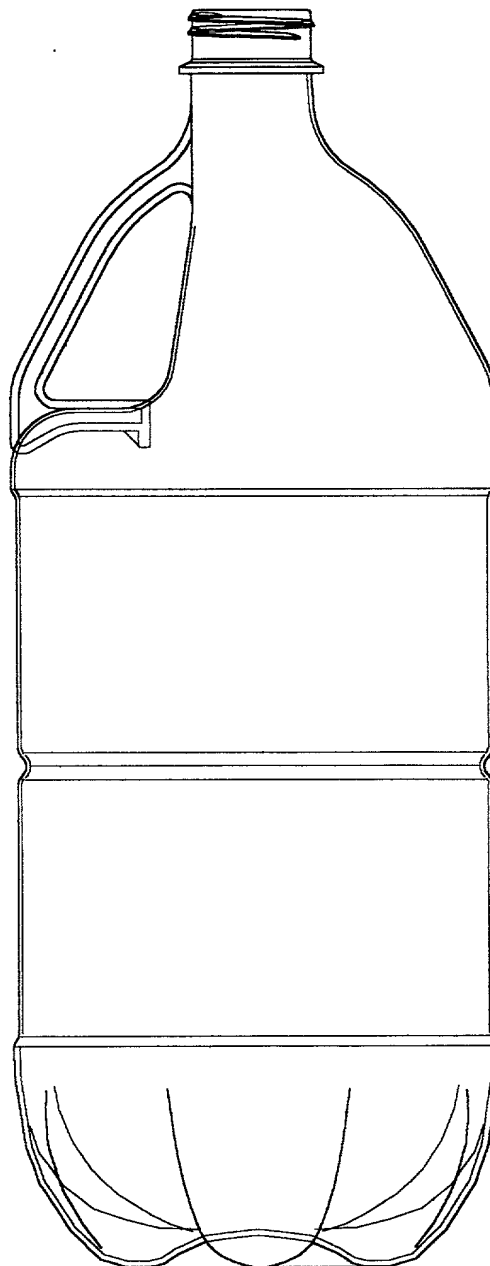


Fig. 30

23/31

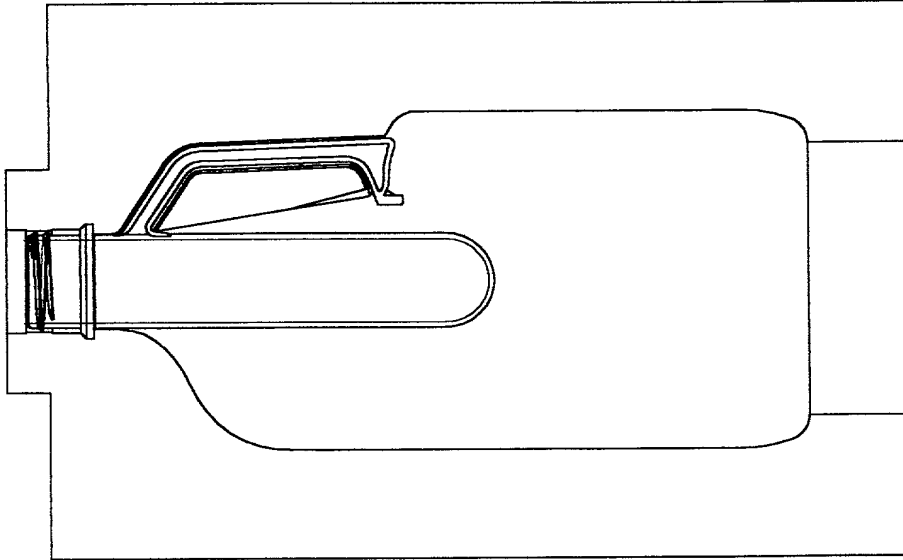


Fig. 32

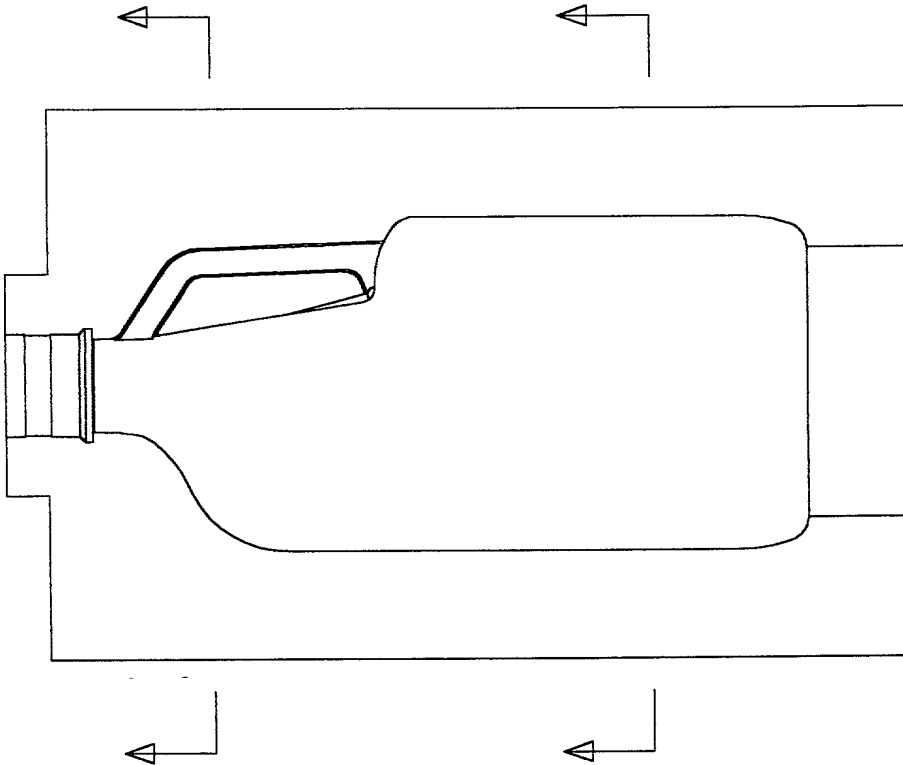


Fig. 31

24/31

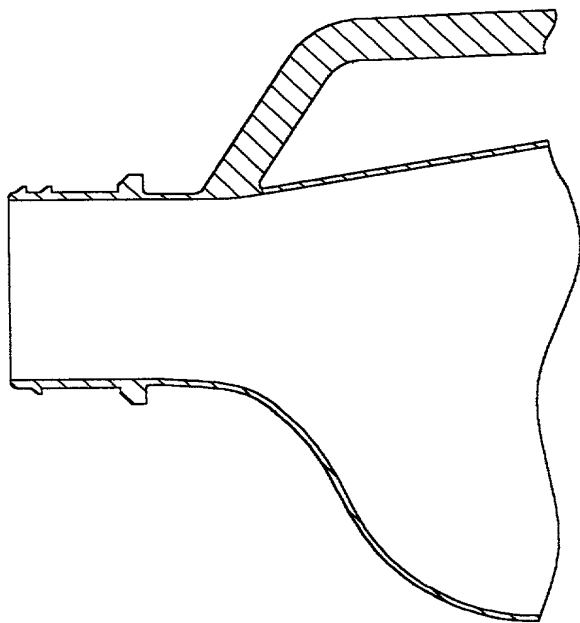


Fig. 34


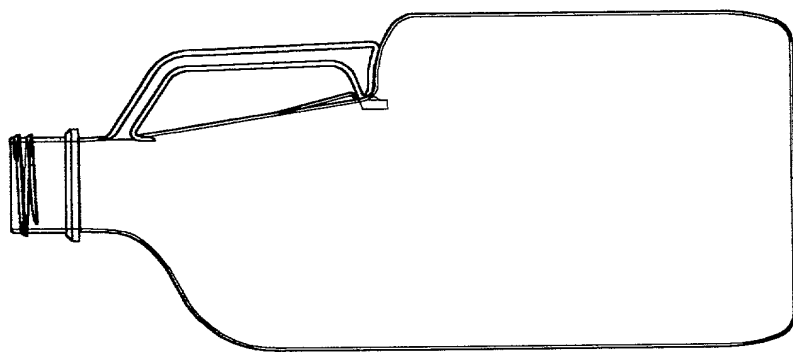


Fig. 33



26/31

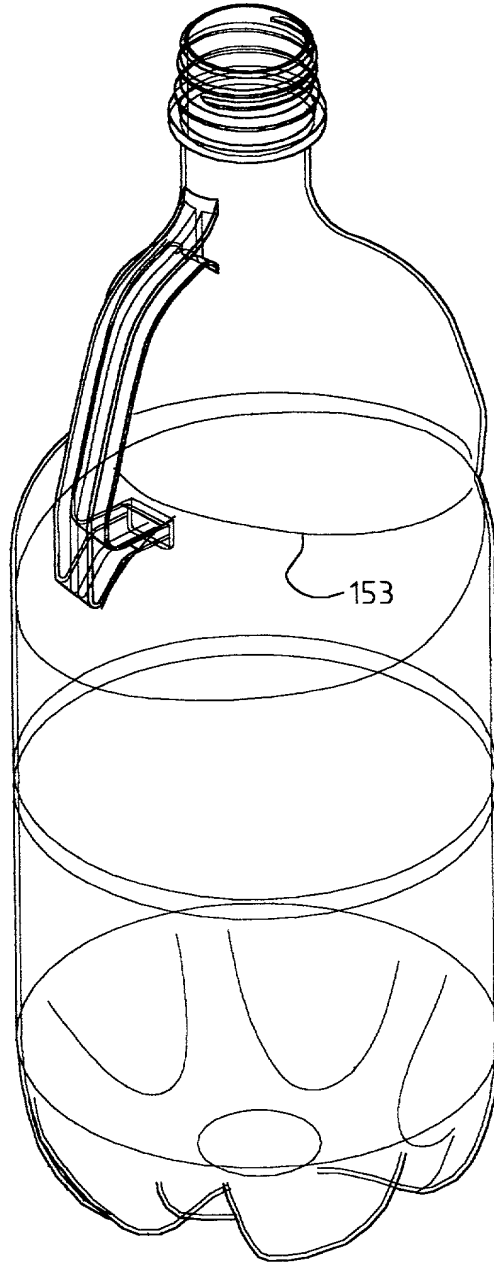


Fig. 36

27/31

150

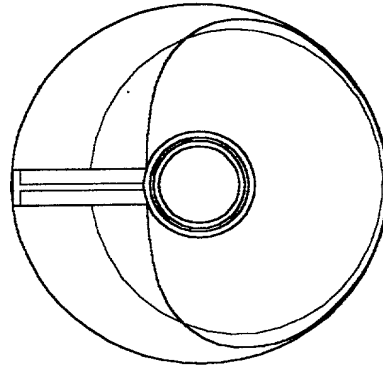


Fig. 39

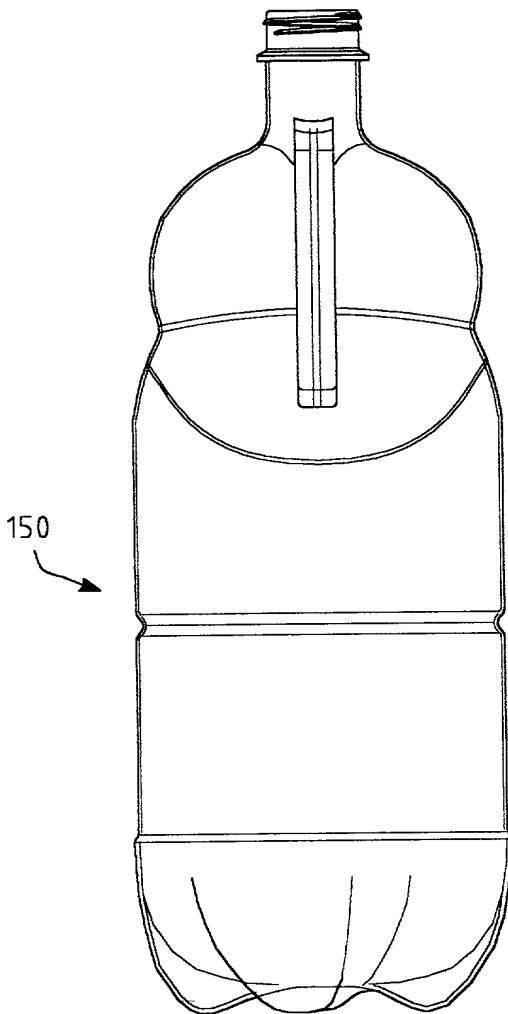


Fig. 37

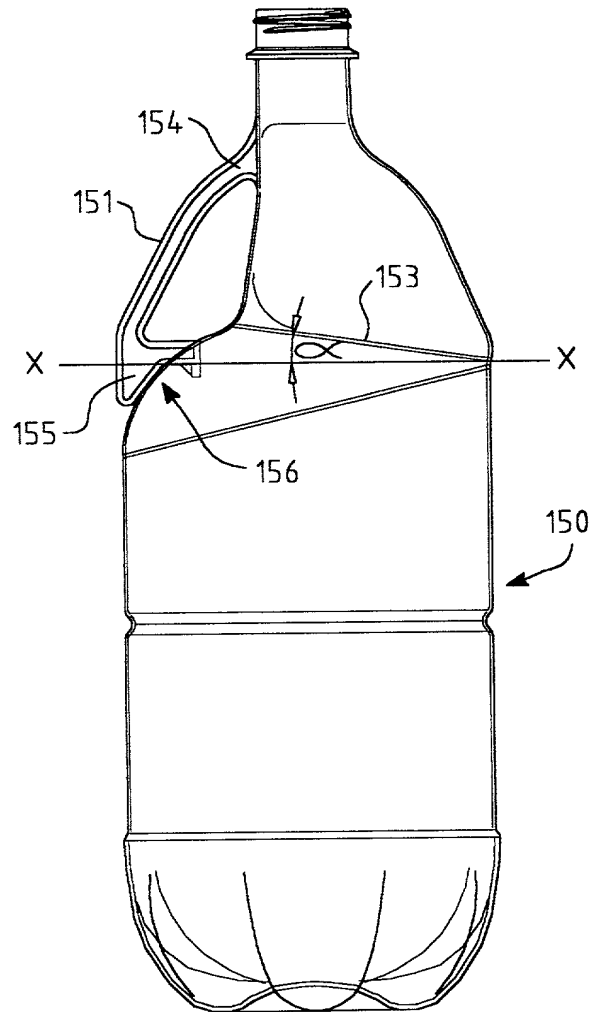


Fig. 38

28/31

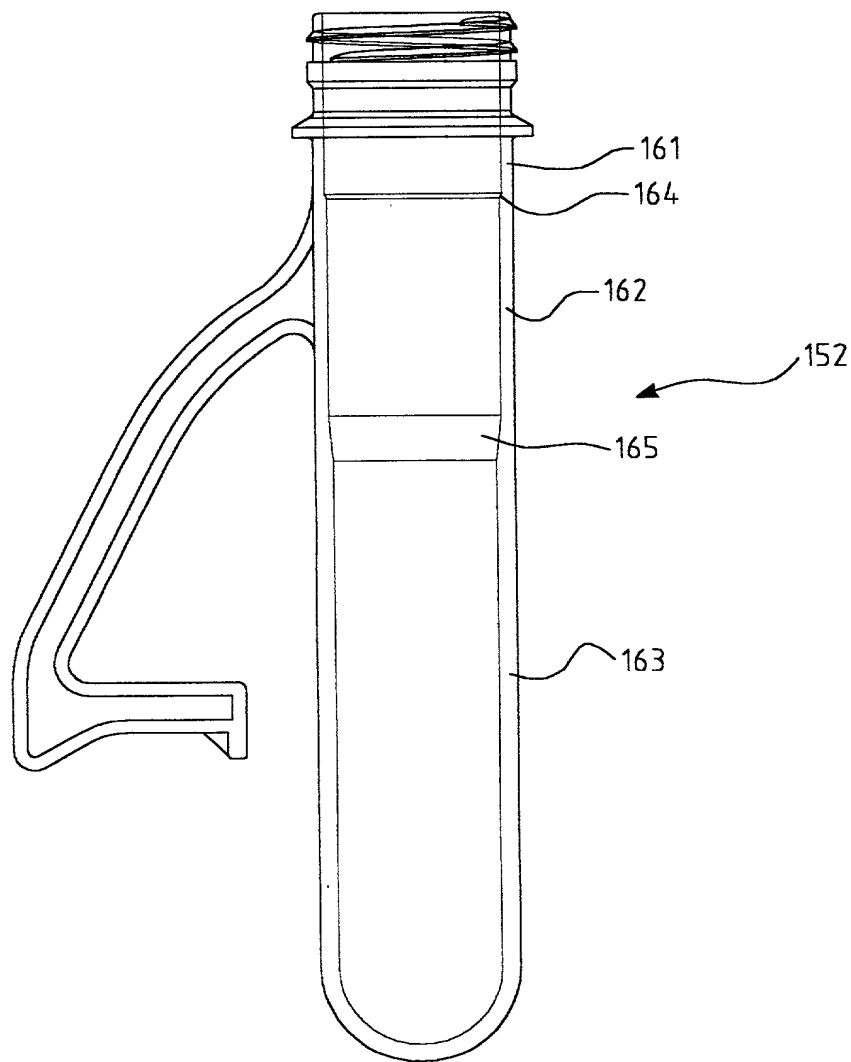


Fig. 40

29/31

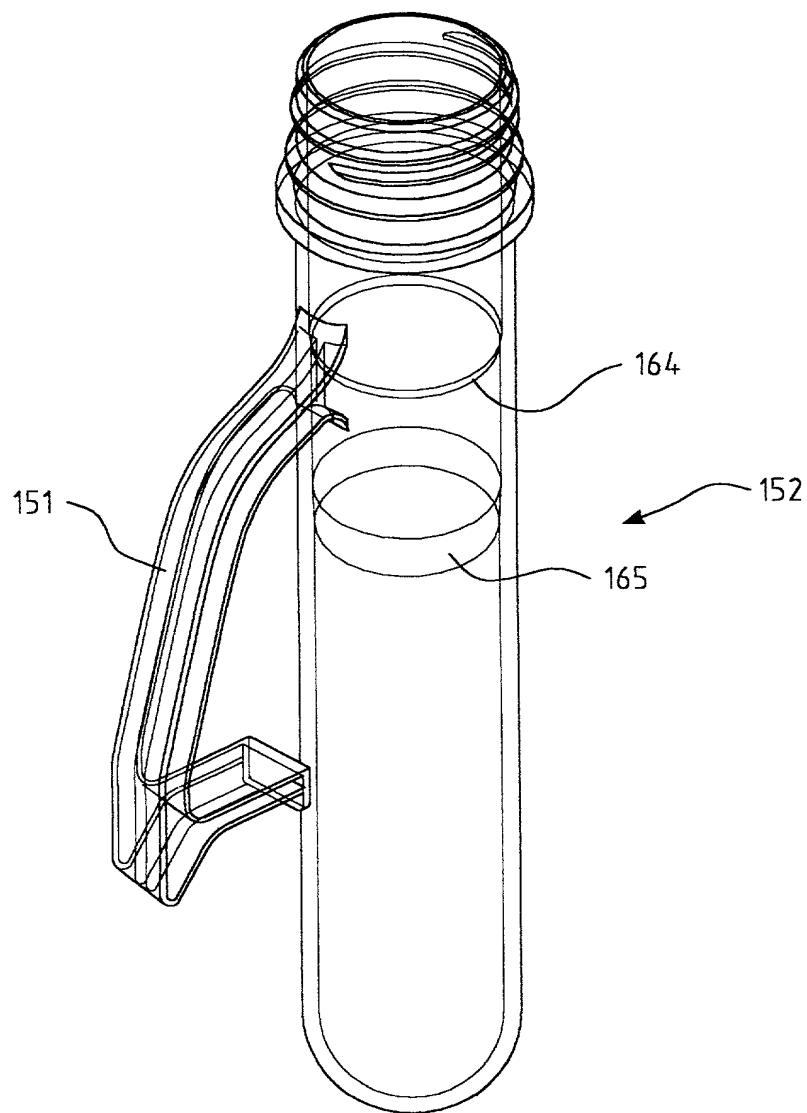


Fig. 41

30/31

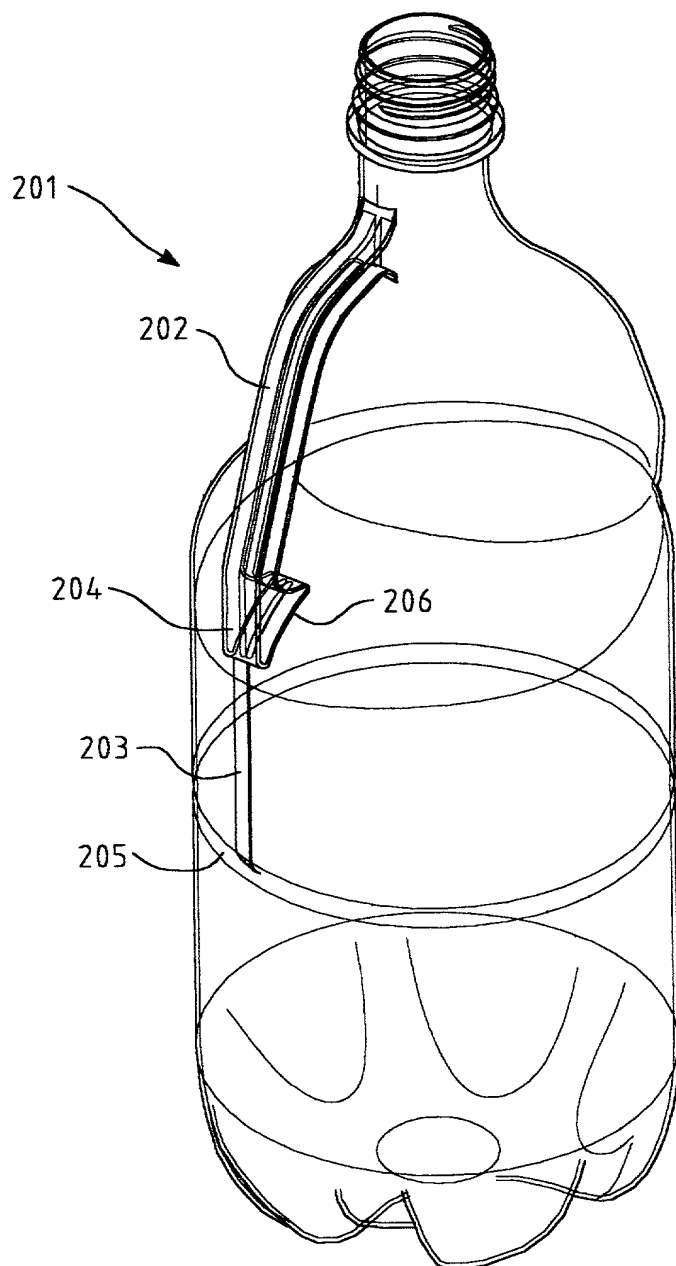


Fig. 42

31/31

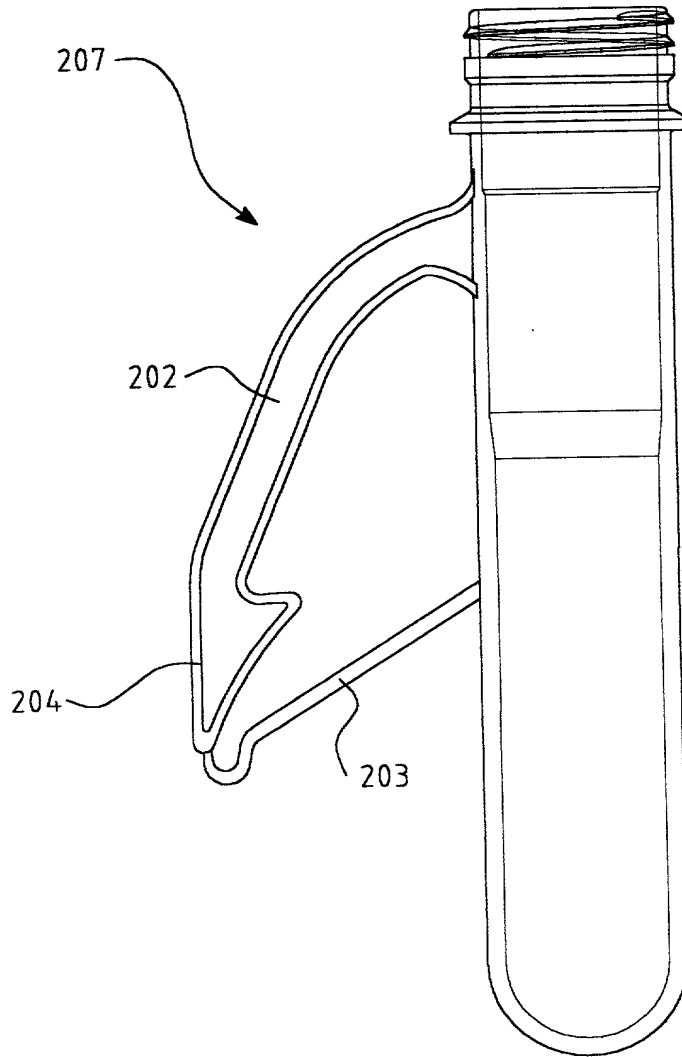



Fig. 43

Please type a plus sign (+) inside this box ☐PTO/SB/01 (12-87)
Approved for use through 9/30/00. OMB 0551-0032

Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

**DECLARATION — Utility or Design Patent Application**

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 355(e) of any PCT International application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application.

U.S. Parent Application or PCT Parent Number

Parent Filing Date (MM/DD/YYYY)

Parent Patent Number (if applicable)

☐ Additional U.S. or PCT International application numbers are filed on a supplemental priority data sheet PTO/SB/02B attached hereto

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

☒ Customer Number 007563☒ Registered practitioner(s) name/registration number listed below

Place Customer Number Bar Code Label here

| Name | Registration Number | Name | Registration Number |
|---------------------|---------------------|--------------------|---------------------|
| KIT M. STETINA | 29,445 | BRUCE B. BRUNDA | 28,497 |
| MARK B. GARRED | 34,823 | WILLIAM J. BRUCKER | 35,462 |
| MATTHEW A. NEWBOLES | 36,224 | THOMAS C. NABER | 26,777 |
| LOWELL ANDERSON | 30,990 | ERIC L. TANEZAKI | 40,196 |

☒ Additional registered practitioner(s) named on supplemental Registered Practitioner Information sheet PTO/SB/02C attached hereto.Direct all correspondence to: ☒ Customer Number 007663 / ☐ Correspondence address below

| | | | |
|---------|-------------------------------------|-----------|----------------|
| Name | Lowell Anderson | | |
| Address | STETINA BRUNDA GARRED & BRUCKER | | |
| Address | 24221 Calle de la Louisa, 4th Floor | | |
| City | Laguna Hills | State | CA |
| ZIP | 92653 | | |
| Country | USA | Telephone | (949) 855-1245 |
| Fax | (949) 855-6371 | | |

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor: ☐ A petition has been filed for this unsigned inventor

| | | | |
|--|-----------------|------------------------|-------------|
| Given Name (first and middle (if any)) | | Family Name or Surname | |
| Glenn Robert | | Beale | |
| Inventor's Signature | Date 16/11/2000 | | |
| Residence: City | Kings Langley | State | AV |
| Country | Australia | | Citizenship |
| Post Office Address | 9 Conway Place | | |
| Post Office Address | | | |
| City | Kings Langley | State | NSW 2147 |
| Country | Australia | | |

☐ Additional inventors are being named on the supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)

Approved for use through 9/30/00. OMB 0651-0032

Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.



DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63)

unsigned
☐ Declaration
Submitted
with Initial
Filing

OR

☒ Declaration
Submitted after Initial
Filing (surcharge
(37 CFR 1.16 (e))
required)

| | |
|--------------------------|---------------------|
| Attorney Docket Number | WJUMR-001US |
| First Named Inventor | BEALE, Glenn Robert |
| COMPLETE IF KNOWN | |
| Application Number | 09 / 508,353 |
| Filing Date | Mar. 09, 2000 |
| Group Art Unit | Unknown |
| Examiner Name | Unknown |

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

CONTAINER WITH INTEGRAL HANDLE, PREFORM AND METHOD OF
MANUFACTURE

the specification of which

(Title of the invention)

☐ is attached hereto
OR

☒ was filed on (MM/DD/YYYY) 09/09/1998 as United States Application Number or PCT International

Application Number PCT/AU98/00738 and was amended on (MM/DD/YYYY) (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT International application having a filing date before that of the application on which priority is claimed.

| Prior Foreign Application Number(s) | Country | Foreign Filing Date (MM/DD/YYYY) | Priority Not Claimed | Certified Copy Attached? | |
|-------------------------------------|-----------|----------------------------------|--------------------------|--------------------------|-------------------------------------|
| | | | | YES | NO |
| PO 9080 | Australia | 09/09/1997 | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |
| PP 0982 | Australia | 12/17/1997 | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |
| PP 3441 | Australia | 05/03/1998 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

| Application Number(s) | Filing Date (MM/DD/YYYY) |
|---|--------------------------|
| | |
| <input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority data sheet: PTO/SB/02B attached hereto. | |

(Page 1 of 2)

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

(July 1998)

PTO/SB/02C (3-87)

Approved for use through 9/30/98. OMB 0651-0032

Parent and Trademark Office: U.S. DEPARTMENT OF COMMERCE
 * required to respond to a collection of information unless it contains a

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

| Variable | Mean | Standard Deviation | Minimum | Maximum |
|-------------------|-------|--------------------|---------|---------|
| Age | 34.5 | 10.2 | 21 | 55 |
| Gender | 0.5 | 0.5 | 0 | 1 |
| Marital Status | 0.7 | 0.5 | 0 | 1 |
| Education | 12.5 | 1.5 | 9 | 16 |
| Income | 15.2 | 5.8 | 5 | 35 |
| Health | 0.8 | 0.4 | 0 | 1 |
| Stress | 0.6 | 0.5 | 0 | 1 |
| Depression | 0.4 | 0.5 | 0 | 1 |
| Loneliness | 0.5 | 0.5 | 0 | 1 |
| Life Satisfaction | 0.7 | 0.4 | 0 | 1 |
| Resilience | 0.6 | 0.5 | 0 | 1 |
| Optimism | 0.7 | 0.4 | 0 | 1 |
| Gratitude | 0.8 | 0.4 | 0 | 1 |
| Forgiveness | 0.7 | 0.5 | 0 | 1 |
| Empathy | 0.8 | 0.4 | 0 | 1 |
| Compassion | 0.7 | 0.5 | 0 | 1 |
| Kindness | 0.8 | 0.4 | 0 | 1 |
| Generosity | 0.7 | 0.5 | 0 | 1 |
| Patience | 0.8 | 0.4 | 0 | 1 |
| Self-control | 0.7 | 0.5 | 0 | 1 |
| Perseverance | 0.8 | 0.4 | 0 | 1 |
| Endurance | 0.7 | 0.5 | 0 | 1 |
| Stamina | 0.8 | 0.4 | 0 | 1 |
| Strength | 0.7 | 0.5 | 0 | 1 |
| Power | 0.8 | 0.4 | 0 | 1 |
| Influence | 0.7 | 0.5 | 0 | 1 |
| Authority | 0.8 | 0.4 | 0 | 1 |
| Leadership | 0.7 | 0.5 | 0 | 1 |
| Management | 0.8 | 0.4 | 0 | 1 |
| Organization | 0.7 | 0.5 | 0 | 1 |
| Planning | 0.8 | 0.4 | 0 | 1 |
| Execution | 0.7 | 0.5 | 0 | 1 |
| Monitoring | 0.8 | 0.4 | 0 | 1 |
| Evaluation | 0.7 | 0.5 | 0 | 1 |
| Reflection | 0.8 | 0.4 | 0 | 1 |
| Learning | 0.7 | 0.5 | 0 | 1 |
| Growth | 0.8 | 0.4 | 0 | 1 |
| Development | 0.7 | 0.5 | 0 | 1 |
| Progress | 0.8 | 0.4 | 0 | 1 |
| Success | 0.7 | 0.5 | 0 | 1 |
| Accomplishment | 0.8 | 0.4 | 0 | 1 |
| Achievement | 0.7 | 0.5 | 0 | 1 |
| Realization | 0.8 | 0.4 | 0 | 1 |
| Fulfillment | 0.7 | 0.5 | 0 | 1 |
| Satisfaction | 0.8 | 0.4 | 0 | 1 |
| Contentment | 0.7 | 0.5 | 0 | 1 |
| Peace | 0.8 | 0.4 | 0 | 1 |
| Harmony | 0.7 | 0.5 | 0 | 1 |
| Balance | 0.8 | 0.4 | 0 | 1 |
| Stability | 0.7 | 0.5 | 0 | 1 |
| Consistency | 0.8 | 0.4 | 0 | 1 |
| Reliability | 0.7 | 0.5 | 0 | 1 |
| Trustworthiness | 0.8 | 0.4 | 0 | 1 |
| Integrity | 0.7 | 0.5 | 0 | 1 |
| Honesty | 0.8 | 0.4 | 0 | 1 |
| Sincerity | 0.7 | 0.5 | 0 | 1 |
| Authenticity | 0.8 | 0.4 | 0 | 1 |
| Genuineness | 0.7 | 0.5 | 0 | 1 |
| Transparency | 0.8 | 0.4 | 0 | 1 |
| Openness | 0.7 | 0.5 | 0 | 1 |
| Communication | 0.8 | 0.4 | 0 | 1 |
| Expression | 0.7 | 0.5 | 0 | 1 |
| Interaction | 0.8 | 0.4 | 0 | 1 |
| Relationship | 0.7 | 0.5 | 0 | 1 |
| Connection | 0.8 | 0.4 | 0 | 1 |
| Engagement | 0.7 | 0.5 | 0 | 1 |
| Participation | 0.8 | 0.4 | 0 | 1 |
| Involvement | 0.7 | 0.5 | 0 | 1 |
| Contribution | 0.8 | 0.4 | 0 | 1 |
| Service | 0.7 | 0.5 | 0 | 1 |
| Helpfulness | 0.8 | 0.4 | 0 | 1 |
| Usefulness | 0.7 | 0.5 | 0 | 1 |
| Value | 0.8 | 0.4 | 0 | 1 |
| Importance | 0.7 | 0.5 | 0 | 1 |
| Significance | 0.8 | 0.4 | 0 | 1 |
| Meaning | 0.7 | 0.5 | 0 | 1 |
| Purpose | 0.8 | 0.4 | 0 | 1 |
| Mission | 0.7 | 0.5 | 0 | 1 |
| Goal | 0.8 | 0.4 | 0 | 1 |
| Objective | 0.7 | 0.5 | 0 | 1 |
| Target | 0.8 | 0.4 | 0 | 1 |
| Result | 0.7 | 0.5 | 0 | 1 |
| Outcome | 0.8 | 0.4 | 0 | 1 |
| Effect | 0.7 | 0.5 | 0 | 1 |
| Impact | 0.8 | 0.4 | 0 | 1 |
| Influence | 0.7 | 0.5 | 0 | 1 |
| Power | 0.8</ | | | |

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.